

Pre-drilled films

ClearLine® X-Pierce™ Film



- 89 µm vinyl film with 18 µm adhesive layer
- With pre-cut X for easy piercing of the adhesive with a pipette tip when taking samples
- After sampling and removal of the tip, the "X" closes and the sample is still protected from contamination
- Dimensions : 79.4 x 145.5 mm
- Operating temperature : -40 °C to +90 °C




Cat. No.	Description	Units/ carton	€ Excl. VAT/ carton
760234	X-Pierce™ Film	100	NC -
760235	X-Pierce™ Film, sterile	50	NC -

ClearLine® EZ-Pierce™ Film



- Easily pierceable film
- Polyethylene film, thickness 70 µm
- Acrylic adhesive
- For direct sample retrieval with single or multi-channel pipette tips or robotic systems
- Dimensions : 82.6 x 146.1 mm
- Can be used from -40 °C to +90 °C

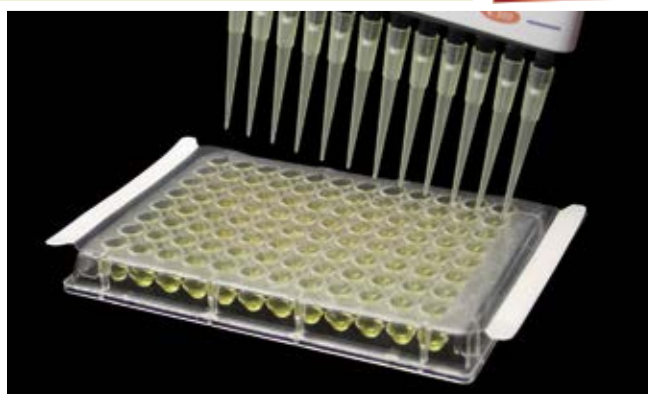


Cat. No.	Description	Units/ carton	€ Excl. VAT/ carton
760216	EZ-Pierce™ Adhesive Film	100	NC -
760247	EZ-Pierce™ Adhesive Film sterile	50	NC -

ClearLine® Zone-Free™ Film



- Film with polyethylene top layer
- Thickness : 70 µm
- Acrylic adhesive, white polypropylene underlay
- For direct sample retrieval with single or multi-channel pipette tips or robotic systems
- Dimensions : 79.4 x 142.9 mm
- The non-adhesive polyethylene layer prevents adhesive from remaining on the tip and coming into contact with the sample
- For 96-well plate
- Clear area above each well free of adhesive
- With installation tabs
- Inert
- Good chemical resistance
- Can be used from -40 °C to +90 °C

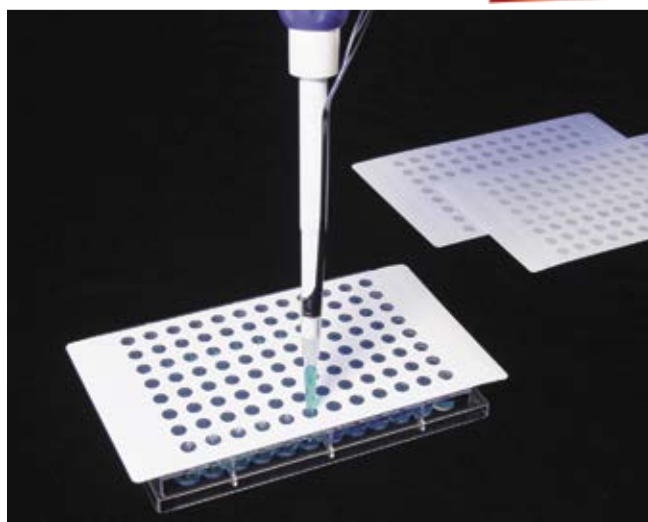


Cat. No.	Description	Units/ bag	Units/ carton	€ Excl. VAT/ carton
760220	Zone-Free™ Adhesive Film	50	50	NC -

4titude Pre-punched peelable adhesive films



Pre-punched transparent polyester adhesive films.

- Peelable, pierceable
- No glue in the pre-drilled areas to prevent clogging of the cones or needles
- Applications: sample handling and collection in 96-well plates
- Not suitable for PCR

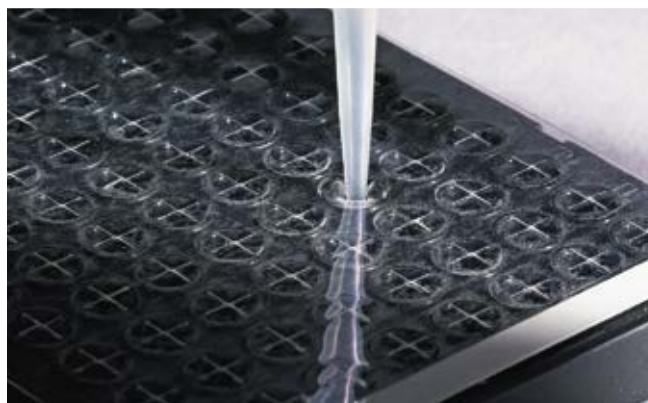

Cat. No	Description	Operating temperature	Units/ carton	€ Excl. VAT/ carton
044716	Pre-punched adhesive film for 96-well plates	-20 °C to +110 °C	100	NC -
045700	Pre-punched adhesive film for 384-well plates	-80 °C to +120 °C	100	NC -