


## Silicone tubing for peristaltic pumps



- ▶ High mechanical strength
- ▶ Ultra-smooth inner surface, precise diameters
- ▶ Thermal resistance : -60 °C to +200 °C
- ▶ Hardness : 60 Shore A
- ▶ Manufactured in a class 10,000 (ISO 7) clean room and on an ISO9001 & ISO13485 certified site
- ▶ Complies with : USP class VI, European Pharmacopoeia, ISO 10993-4
- ▶ Supplied with certificate of conformity

Cat. No.	Inn. Ø x out. Ø (mm)	Thickness (mm)	Length roll (m)	€ the roll	Cat. No.	Inn. Ø x out. Ø (mm)	Thickness (mm)	Length roll (m)	€ the roll
351071	1.6 x 6.4	2.4	25	NC -	351082	8.0 x 14.4	3.2	25	NC -
351072	3.2 x 6.4	1.6	25	NC -	351083	9.6 x 14.4	2.4	25	NC -
351073	3.2 x 8.0	2.4	25	NC -	351084	9.6 x 16.0	3.2	25	NC -
351074	4.8 x 8.0	1.6	25	NC -	351085	9.6 x 19.2	4.8	25	NC -
351075	4.8 x 9.6	2.4	25	NC -	351086	12.0 x 20.0	4.0	25	NC -
351076	4.8 x 11.2	3.2	25	NC -	351087	12.7 x 17.5	2.4	25	NC -
351077	6.4 x 9.6	1.6	25	NC -	351088	12.7 x 19.1	3.2	25	NC -
351078	6.4 x 11.2	2.4	25	NC -	351089	12.7 x 22.3	4.8	15	NC -
351079	6.4 x 12.8	3.2	25	NC -	351090	15.9 x 22.3	3.2	15	NC -
351080	8.0 x 11.2	1.6	25	NC -	351091	15.9 x 25.5	4.8	15	NC -
351081	8.0 x 12.8	2.4	25	NC -	351092	16.0 x 24.0	4.0	15	NC -
					351093	19.1 x 28.7	4.8	15	NC -
					351094	25.4 x 35.0	4.8	15	NC -

## Iso-Versinic Fluoroelastomer tubing

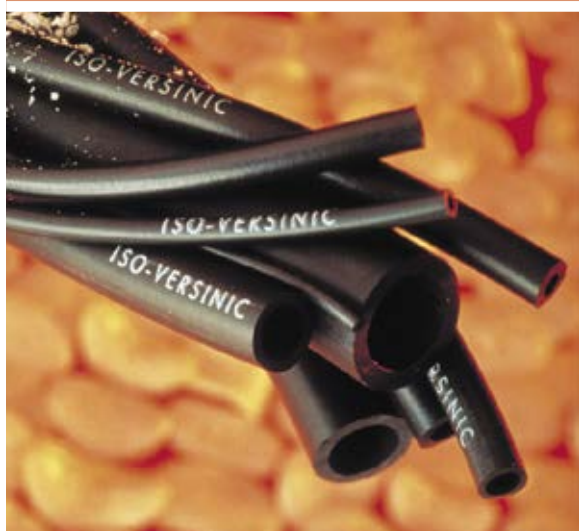

- ▶ 100% fluoroelastomer
- ▶ Exceptional resistance to strong acids, oxidants, aromatic and chlorinated solvents, alcohols and bleaching agents
- ▶ Can be used between -15 °C and +200 °C
- ▶ Recommended for the transport of very aggressive chemicals
- ▶ Good resistance to ageing

Cat. No.	Inn. Ø x out. Ø (mm)	Long. (m)	€	Cat. No.	Inn. Ø x out. Ø (mm)	Long. (m)	€ the roll
225455	1 x 3	50	NC -	225464	6 x 10	25	NC -
225456	1.5 x 3	50	NC -	225465	6 x 12	25	NC -
225457	2 x 4	50	NC -	225236	7 x 10	25	NC -
225458	3 x 5	50	NC -	225466	8 x 11	25	NC -
225459	4 x 6	50	NC -	225467	8 x 12	25	NC -
225460	4 x 8	25	NC -	225468	10 x 14	25	NC -
225461	5 x 8	25	NC -	225469	12 x 17	25	NC -
225463	6 x 9	25	NC -	260064*	30 x 40	10	NC -

\* : Iso-Versinic tubing, black

## Pharmed tubing



- ▶ For peristaltic pumps and cell culture
- ▶ Sterilisation possible in autoclave
- ▶ Complies with USP Class VI, FDA and NSF criteria
- ▶ Less gas permeable than silicone tubing
- ▶ Opaque to light
- ▶ Usable from - 51 °C to +135 °C
- ▶ Manufactured in an ISO 7 cleanroom

Cat. No.	Inn. Ø x out. Ø (mm)	Long. (m)	€	Cat. No.	Inn. Ø x out. Ø (mm)	Long. (m)	€ the roll
260096	0.50 x 3.7	7.5	NC -	260094	6.4 x 9.5	7.5	NC -
260087	0.8 x 4	7.5	NC -	260095	6.4 x 12.7	7.5	NC -
260088	1.6 x 3.2	7.5	NC -	260097	8 x 11.1	7.5	NC -
260089	1.6 x 4.8	7.5	NC -	260098	9.5 x 12.7	7.5	NC -
260090	2.4 x 5.6	7.5	NC -	260099	9.5 x 15.9	7.5	NC -
260091	3.2 x 4.8	7.5	NC -	260100	12.7 x 19	7.5	NC -
260092	3.2 x 6.4	7.5	NC -	260101	15.9 x 22.2	7.5	NC -
260093	4.8 x 8	7.5	NC -	260102	19 x 25.4	7.5	NC -