

Digital Dry Bath HB120-S



- Digital interface with rotary knob
- Continuous or timer operation up to 99 h 59 min
- Integrated overheating protection
- Supplied with lid

Temperature range	Ambient at +120 °C
Temperature stability	± 0.5 °C
Temperature uniformity	± 0.5 °C
Heating rate	5.5 °C/min
Block material	Aluminium
Dimensions W x D x H (mm)	175 x 290 x 85
Weight (kg)	3
Cat. No.	861161
€	N/A -

Blocks

Compatibility	No. of wells	Low blocks	€	Standard blocks	€
0.2 ml microtube	54	861171	N/A -	861162	N/A -
0.5 ml microtube	40	861172	N/A -	861163	N/A -
1.5 ml microtube	40	861173	N/A -	861164	N/A -
2.0 ml microtube	40	861174	N/A -	861165	N/A -
Test tubes Ø 13 mm	45	-	-	861166	N/A -
5 or 15 ml centrifuge tubes	28	-	-	861167	N/A -
50 ml centrifuge tubes	8	-	-	861168	N/A -
96 or 384 well microplates	1	861175	N/A -	861169	N/A -
0.2 ml	18	861176	N/A -	861170	N/A -
0.5 ml	18				
1.5/2.0 ml	18				
96-well PCR plates or tubes or strips	1	861177	N/A -	-	-

LabArmor Bead Heating Baths



- Stainless steel waterless bead bath, (no contamination)
- Temperature range: ambient + 5 °C to 80 °C
- Temperature uniformity at 37 °C: ± 0.5 °C / to 65 °C: ± 1 °C
- Fast heat-up, even and constant temperature
- No evaporation due to water heating
- Suitable for different sizes of tubes, petri dishes and plates
- 3 capacities: 6, 14 and 20 l
- Power 500 W 50/60 Hz, 230 V
- Lid included, no block needed, no racks needed




Beads

Cat. No.	Bead bottle volume (l)	€
582000	0.75	N/A -
582001	2	N/A -
582002	4	N/A -
582003	8	N/A -

Model	M706	M714	M720
Capacity (l)	6	14	20
Bead capacity (l)	5	12	15
Int. dim. L x D x H (cm)	30.5 x 15.5 x 15.2	30.5 x 30.7 x 15.2	30.5 x 43.4 x 15.2
Ext. dim. L x D x H (cm)	40.4 x 31.2 x 21.6	40.4 x 47 x 21.6	40.4 x 59.3 x 21.6
Weight (kg)	13.6	29	38.5
Cat. No. with beads	582004	582006	582008
€ block + beads	N/A -	N/A -	N/A -
Block Cat. No.	582005	582007	582009
€ block	N/A -	N/A -	N/A -

DryTemp Bead Heating Baths

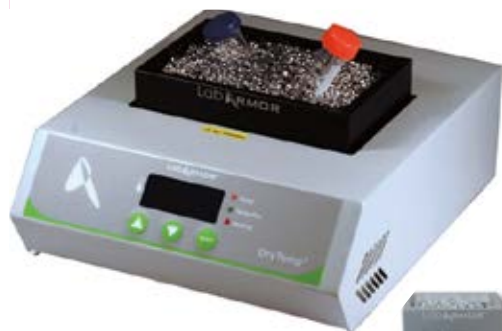

- Temperature range: amb. +5 °C to 150 °C
- Microprocessor controlled
- H x L x W (mm): 81 x 221 x 262
- Timer function
- Power supply: 230 V, 50/60 Hz
- Single or dual coloured blocks

Cat. No.	Description	€
582010	Digital bead heating bath	N/A -

Blocks - supplied with beads

- Temperature range: - 80 to + 180 °C
- Temperature uniformity: ± 1 °C (to 95 °C)

Model	Single block	Dual block
Bead capacity (l)	0.25	0.50
H x L x W (mm)	95 x 76 x 76	95 x 152 x 76
Weight (kg)	0.95	1.9
Black	582011	582016
Blue	582012	582017
Golden	582013	582018
Red	582014	582019
Silver	582015	582020
€	N/A -	N/A -

