


## Hybridization ovens

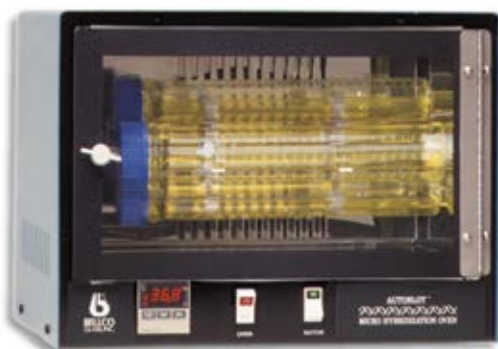

Bellco hybridization ovens allow all pre-hybridization, hybridization and washing operations to be carried out at a perfectly regulated temperature and with rotary motion agitation.

Bellco hybridization ovens are available in three versions: standard oven for 12 tubes, mini oven for 4 tubes, mini oven for 6 tubes.

- Digital temperature display
- Temperature adjustable from 5 °C to 99 °C
- Microprocessor temperature control
- Fast and even temperature distribution by ventilation
- Rotational speed of 7.5 rpm
- Removable rotating unit for easy maintenance

### Hybridization ovens

Cat. No.	Capacity	Internal dim. (cm)	External dim. (cm)	€
793000	4 x 35 mm tubes	37.5 x 18 x 20.5	41.5 x 34.5 x 32.5	N/A -
793100	6 x 35 mm tubes	37.5 x 18 x 20.5	41.5 x 34.5 x 32.5	N/A -

### Accessories for hybridization ovens

Cat. No.	Description	Dimensions	Units/ cardboard box	€ / cardboard box
791039	Hybridization tube	35 x 300 mm	2	N/A -
791036	Hybridization tube	35 x 225 mm	2	N/A -
791037	Hybridization tube	35 x 150 mm	2	N/A -
791038	Hybridization tube	35 x 100 mm	2	N/A -
791020	Nylon sheet	23 x 23 cm	5	N/A -
791030	Rack for 12 tubes	-	1	N/A -

## Mini cabinet freezer - 30 °C LF 100



- Ventilated cooling and automatic defrosting
- Digital display
- Height-adjustable shelves
- Door lockable by key
- Automatic door reminder
- Visual and audible alarms (temperature, power failure)
- Adjustable high and low temperature alarm
- Stainless steel interior and white galvanised exterior
- Stainless steel shelves or drawers possible (optional)

Volume (l)	94
Temperature	- 30 °C
Display	Digital
Int. Dim. H x W x D (mm)	434 x 490 x 440
Ext. Dim. H x W x D (mm)	790 x 610 x 659
Supplied with plastic shelves	2
Weight (kg)	65
Consumption (kwh/24 h)	7.2
Power supply	230 V / 50-60 Hz
<b>Cat. No.</b>	<b>960021</b>
<b>€</b>	<b>N/A -</b>

### Accessories

Cat. No.	Description	€
960023	Additional plastic grid (holders included)	N/A -
960024	Additional stainless steel grids (holders included)	N/A -
960025	Stainless steel drawer (holders included)	N/A -

## Compact benchtop -80 °C mini freezers



Very compact -80 °C freezers can be positioned under the bench, giving quick and easy access to samples.

- Different capacities: 7 l, 50 l and 88 l
- Touchscreen
- Visual and audible alarms for: power failure, temperature fault, open door etc.
- Dry contact for alarm reporting
- Vacuum insulated panels for optimal insulation and reduced energy costs
- Natural refrigerant
- Pressure relief valve for immediate reopening of the door
- Heated door seal to reduce ice formation

Model	COMPACT P10	COMPACT P15	COMPACT P90
Volume (litre)	7	50	88
Total capacity of 2 ml tanks	5	30	60
Int. Dim. W x D x H (mm)	-	-	-
Ext. Dim. W x D x H (mm)	-	-	-
<b>Cat. No.</b>	<b>960044</b>	<b>960045</b>	<b>960046</b>
<b>€</b>	<b>N/A -</b>	<b>N/A -</b>	<b>N/A -</b>