



dulis
LABWARE FOR YOU

Standing Ovation

Promotions and new products for life sciences



From September 1st
to December 31st 2024

Dear customer,

At Dulis, your satisfaction is our number one priority!

We are well aware of the budgetary constraints you face, and how this can complicate your day-to-day work. That's why we've come up with an exceptional promotion, bringing together all the essential consumables and equipment for your laboratory work, so that you can continue to work in the best possible conditions.

Thanks to the support of our manufacturers, you'll discover a host of products at unbeatable prices, while benefiting from the service and responsiveness for which Dulis is renowned.


We would also like to offer you a well-deserved **Standing Ovation, to all those who work every day to advance research.**

**This promotion is for you, so don't hesitate to take advantage of it!
We hope you enjoy reading this issue and thank you for your confidence.**

**Claude Gazel
Chief Sales and
Marketing Officer**





ALPHABETICAL INDEX

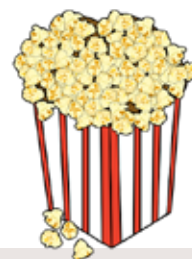

3D shaker	36	Flasks	4, 5, 24	Polypropylene	
Adhesive films	7	Freezer boxes	20	autoclavable caps	25
Autoclavable bottle	25	Frost hoover	41	Portable scales	39
Beakers	22, 26	Generators	9	Racks	16, 19, 21
BENCHMARK	36, 37, 38	GILAC	22	Racks for cryoboxes	41
Benchtop conductivity meter	12	GILSON	17, 45	Racks for microtubes	19
Benchtop pH-meter	12	Glass wide-neck flasks	24	Recycled crates	22
BLAUBRAND	26	Gloves	27	Refrigerator thermometers	13
Bottles	24, 25	HBSS	6	RNase-Exitus Plus	10
BRAND	14, 18, 22	Heated magnetic shaker	32	Rocker shaker	34
BREMA	41	HELLMA ANALYTICS	11	Rotary shaker	35
Brushes	29	HPLC	23	Safety cabinets multirisk	30
Buffered saline solutions	6	HPLC starter kit	23	Safety cabinets 30 min	31
Camera	44	HPLC waste kit	23	Safety plug	23
Centrifuges	40	Ice machines	41	SAMPLING SYSTEMS	29
Chronometers	13	Incubators	36, 37, 42	SARTORIUS	18
Cleaning solution	11	Integral inserts	5	SCAT	23
CLEARLINE	7, 8, 10, 14, 16, 20, 30, 42	IZIDEFROST	41	SCIENTIFIC INDUSTRIES	33
COLE-PARMER	32, 34	Laboratory grinder	39	Shaker for incubator	36, 37, 42
Cooling racks	21	Lift jack	11	SHIELD	27
CORNING	4, 5, 6, 9	Magnetic shaker	32	Short-necked ground flasks	25
Cryoboxes in cardboard	20	Masks	28	SLS	24, 26, 40
Cryogloves	28	METTLER TOLEDO	12	Spectrophotometer	9
Culture flasks	4, 5	Microcentrifuges	40	Stainless steel table	30
Culture media	6	Micropipettes	15, 16, 17, 18	Stainless steel trolleys	29
CYTIVA	23	Microplates	4, 5	Suction system	45
Digital dry baths	37	Microscopes	43, 44	Tank electrophoresis	10
Digital microscope	44	Microwave ovens	40	Tanks for spectroscopy	11
Dispenser for overshoes	28	Mobile under-counter furniture	30	Temperature recorder	13
Dispenser for pleated masks	28	OHAUS	32, 33, 34, 36, 39	THERMO SCIENTIFIC	35
Dispensers	28, 45	OPTIKA	43, 44	Thermohygrometer	13
Dispensette	14	Orbital shaker	33, 34	Thinners	45
Dispensing pipettes	18	Overglasses	29	TRACEABLE	13
DNA-Exitus Plus	10	PANREAC-APPLICHEM	10	Transport dewars	21
DPBS	6	PC tablet with camera for		TRIONYX	30, 31
DRUMMOND SCIENTIFIC	14	microscope	44	Two-way shaker	34
Dry bath shakers	37, 38	PCR plates	8	ULA microplates	4
DWK	22, 24, 25, 26	PH / conductivity meter	12	ULA support	4
Electronic micropipettes	15, 18	Phase separation papers	23	Ultrasonic baths	38
ELMA	38	Pipe fittings	22	VELP SCIENTIFICA	32, 33
EPPENDORF	15, 16, 18, 37	Pipe fittings 3-way	22	Volumetric flasks	26
Erlenmeyer for intensive use	26	Pipette controller	14	Vortex shaker	32, 33
Face shield	29	Pipette Manager	16	WARING	39
FALCON	5	Plastic trolleys	29	Workstations	42
Film for plates	7	Polycarbonate cryoboxes	20		

CELL CULTURE



CORNING® ULTRA-LOW ATTACHMENT SUPPORT

- Sterile

Applications:

- + 3D formation of spheroids
- + The maintenance of cells in suspension
- + Preventing stem cell differentiation
- + Preventing the division of adherent cells

Plate

Part no.	Number of wells	Colour	Type of bottom	Units/ bag	Units/ box	€/ box	€ PROMO
007007	96	Transparent	Round	1	24	695~	235 -




CORNING

CORNING® MICROPLATES FOR ULA (ULTRA LOW ATTACHMENT) SPHEROIDS

CORNING

- One plate for all steps (culture and testing), no handling or delicate transfer of spheroids required
- Unique well geometry for reproducible well-to-well growth of 3D cultures
- Sterile

Part no.	Number of wells	Units/ bag	Units/ box	€/ box	PROMO €
004520	96	10	50	3693~	728 -
004516	384	1	5	531~	200 -

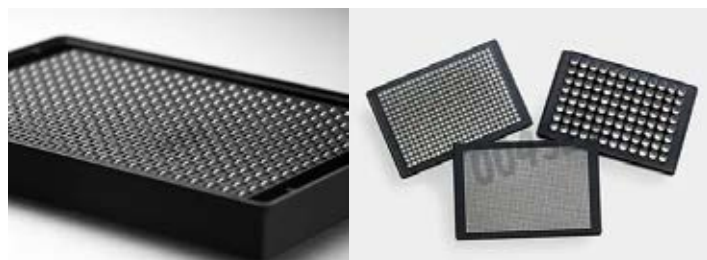

CORNING® ELPLASIA® TECHNOLOGY

- For the mass production of uniform-sized spheroids for *in vivo* tumour studies or the screening of anti-cancer molecules
- Round well geometry (for spheroid formation and expansion)
- The bottom of the wells has micro-cavities allowing the formation of several spheroids per well
- Supplied with lid
- Sterile



ULA microplate with round wells

CORNING

Part no.	Well shape	Number of wells	Treatment	Average number of spheroids/well	Units/ bag	Units/ box	€/ box	PROMO €
004442	Round	96	ULA	79	1	5	629~	350 -

CORNING® ELPLASIA® 12K CULTURE FLASK

- 152 micro-cavities per cm² generate around 12,000 spheroids
- Surface area similar to a T 75 cm² bottle
- ULA-Treated
- A liquid deflection device minimises disturbance of the spheroids during the liquid handling stages
- The geometry of the micro-cavity allows the spheroids to remain in place during medium change stages without compromising complete recovery at harvest time.
- Micro-cavity sizes (Ø x depth): 850 x 650 µm
- Spheroid growth surface (Ø x depth): 500 x 600 µm
- Work volume 25 to 50 ml
- Sterile



CORNING




Part no.	Treatment type	Cap type	Units/ bag	Units/ box	€/ box	PROMO €
004537	ULA	Standard	1	5	598~	425 -

CELL CULTURE

CORNING® INTEGRAL INSERTS IN 24- OR 96-WELL PLATES

CORNING

- Test automation (robot compatible)
- Some inserts are coated to improve adhesion
- Invasion, migration and angiogenesis chambers already prepared with suitable coatings

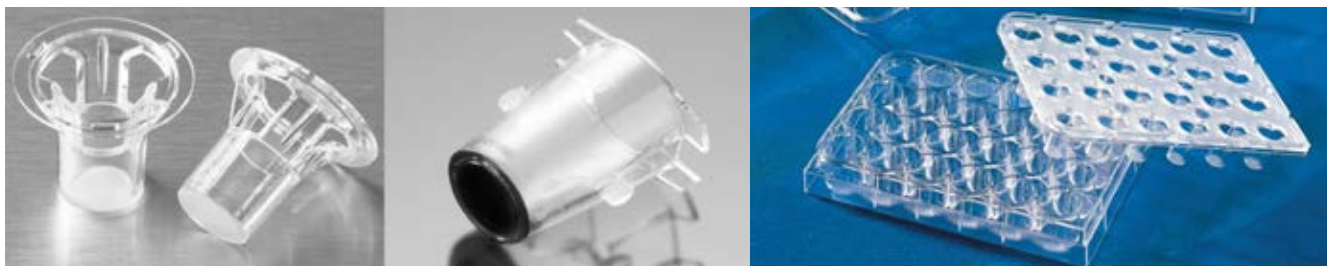

Part no.	Designation	Membrane type	Membrane material	Units/box	€/box	PROMO €
		Porosity 0.4 µm				
003381	96-well Insert System	Translucent	PC	1	546~	260 -
		Porosity 1 µm				
003380	96-well Insert System	Transparent	PET	1	546~	275 -

FALCON® MULTI-LAYER CELL CULTURE FLASKS

FALCON®
A Corning Brand




- Treated cell culture
- Available in:
 - 3 layers - growth area 525 cm²
 - 5 layers - growth area 875 cm²
- Maximum 50 ml of medium per layer
- Homogeneous distribution of the culture medium and cells on the different layers for homogeneous cell growth
- Batch number printed on each flask to ensure traceability
- Straight neck

Part no.	Surface area in cm ²	Cap type	Treatment	Units/bag	Units/box	€/box	PROMO €
3 layers							
353143	525	Filtering	TC	1	12	195.33~	120 -
5 layers							
353144	875	Filtering	TC	1	8	219.75~	160 -

CORNING® 96-WELL ELISA MICROPLATES

CORNING

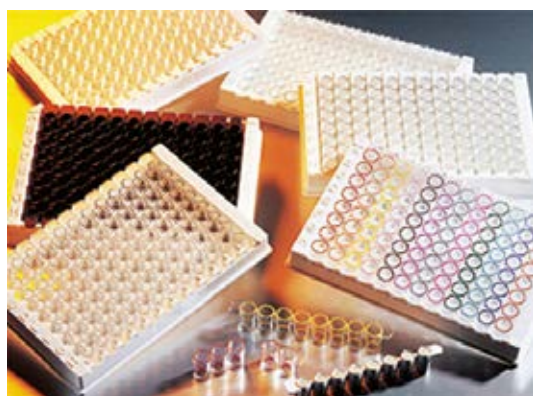

- Light colour for absorbance detection
- Flat-bottom wells
- Hydrophobic
- High binding type: affinity for hydrophobic and positively charged molecules (> 10 kD)

Corning ELISA Stripwell 96-well Microplates

- Strips with flat wells are easily removable and pre-assembled in a holder.

Part no.	Bottom	Colour	Binding	Units/bag	Units/box	€/box	PROMO €
002592	Flat	Clear	High	25	100	882~	365 -

CELL CULTURE

CORNING RANGE - CLASSIC CULTURE MEDIA

CORNING



- On site manufacturing cGMP
- ISO 13485:2003 Certified
- Sterile (SAL 10⁻³)
- Liquids made with WFI water

Type of media	L-Glutamine	Sodium pyruvate	Phenol red	HEPES	Glucose	Sodium bicarbonate	Thyoglycerol	β-Mercaptoethanol	Earle's Salt	Calcium & Magnesium	Nucleoside	L-Cystine / L-Methionine	Part no.	Corning part no.	Vol. (ml)	Units/box	€/box	PROMO €
	+	+	+	-	4,5 g/L								702504	10-013-CVR	500	6	80.80~	23.50 -
	-	+	+	-	4,5 g/L								702549	15-013-CVR	500	6	85~	25.50 -
DMEM medium	-	-	+	-	4,5 g/L								702555	15-017-CVR	500	6	201~	33.50 -
		+	+		4,5 g/L								702536	10-101-CV	500	6	233~	26 -
50/50 mixture of DMEM and HAM F-12 medium	+	+	-	-		+							702566	16-405-CVR	500	6	242~	24 -
	-	+	+			+		+		-			702547	15-012-CVR	500	6	238~	26 -
Ham's F-12 medium	+												702531	10-080-CVR	500	6	185.50~	31 -
F-12K nutrient medium Kaighn modification	+	+	+		+	+							702515	10-025-CVR	500	6	268~	37 -
	+		+	-	+	+						+	702519	10-040-CVR	500	6	81.70~	23.50 -
RPMI 1640 Medium	+		+	25 mM		+						+	702523	10-041-CVR	500	6	123.80~	27.50 -
	-		-	-		+						+	702568	17-105-CVR	500	6	218~	32 -
	-		+	-		+						+	702559	15-040-CVR	500	6	87.90~	22.50 -

BUFFERED SALINE SOLUTIONS

CORNING


HBSS

Part no.	Corning part no.	Designation	Phenol red	Vol.	Units/box	€/box	PROMO €
702583	21-022-CVR	Without calcium without magnesium	Without	500 ml	6	98.20~	23.50 -
702581	21-021-CV	Without calcium without magnesium	Without	500 ml	6	156.60~	36.50 -

DPBS

Part no.	Corning part no.	Designation	Vol.	Units/box	€/box	PROMO €
702587	21-030-CVR	1X, with calcium and magnesium	500 ml	6	69~	23.50 -
702589	21-031-CVR	1X, calcium-free, magnesium-free	500 ml	6	61.90~	20 -

MOLECULAR BIOLOGY

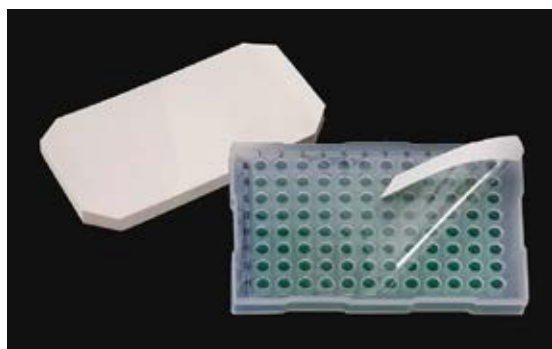


CLEARLINE® EXTREME™ SEAL FILM FOR UNSKIRTED PLATE

ClearLine

- Applications: PCR
- Made of 50.8 µm polyester
- Operating temperature: -20 °C to 120 °C
- With two detachable tabs
- Transparent
- Strong adhesive to minimise evaporation
- Do not leave residues
- DNase-free, RNase-free

Part no.	Designation	Dimensions (mm)	Units/box	€	PROMO €
765267	ClearLine® eXTReme™ Seal film for unskirted plate	118.1 x 78.3	100	100.30-	52.90 -

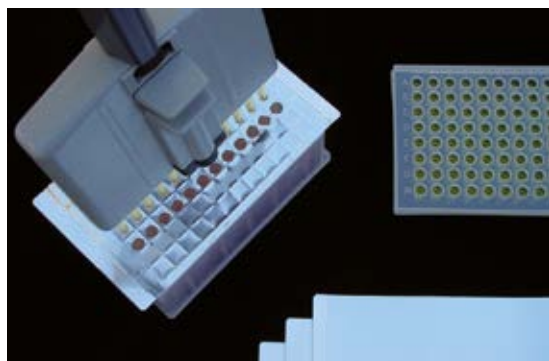


ALUMASEAL® II™ CLEARLINE® FILM

ClearLine

- Applications: PCR, long-term storage
- 38.1 µm aluminium
- Operating temperature: -80 °C to +120 °C
- Universal
- Dimensions without tab: 125.4 x 82.6 mm
- Good chemical resistance
- Pierceable, opaque
- Does not withdraw into itself

Part no.	Designation	Units/box	€/ box	PROMO €
760212	AlumaSeal® II™ ClearLine® Film	100	199.40-	99 -

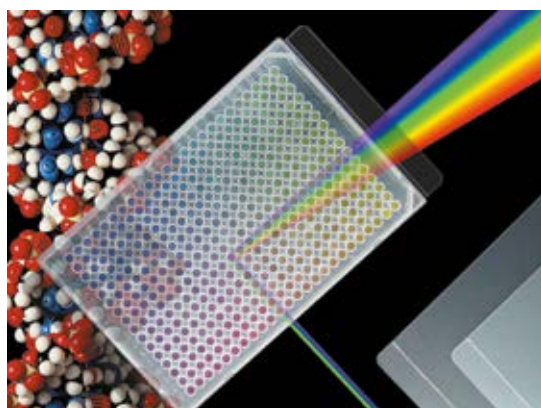

THERMALSEAL® RT2™ AND RT2RR™ CLEARLINE® ADHESIVE FILMS

ClearLine

- Application: qPCR
- With two detachable tabs
- Optically clear, low autofluorescence
- High optical quality films with excellent adhesion

more info
[dulis.be / dulis.nl](http://dulis.be/dulis.nl)

Part no.	Designation	Dimensions (mm)	Units/box	€	PROMO €
760236	ThermalSeal® RT2RR™ film ClearLine® for unskirted plates	118.1 x 77.8	100	255-	149 -
760208	ClearLine® ThermalSeal® RT2™ film for skirted or half-skirted plates	121.9 x 79.4	100	410-	189 -

WEB TIP!

BELGIUM



NETHERLANDS



Any doubts about compatibility? Our adhesive film selection guide will give you all the details!

<https://www.dulis.be/catalogue/selection-guide?language=en>

<https://www.dulis.nl/catalogue/selection-guide>

THERMALSEAL RTS™ CLEARLINE® ADHESIVE FILM

ClearLine

- Applications: qPCR, long-term storage, crystallography and HPLC
- For all types of plates
- Optically clear, low autofluorescence
- Good chemical resistance
- Silicone adhesive is released only when pressure is applied for a perfect adhesion without interference with the sample



Part no.	Designation	Units/box	€/box	€ PROMO
765246	Thermalseal RTS™ ClearLine® film	100	334~	169 -

CLEARLINE® PCR PLATES

- 96-well plate
- Natural colour
- Alphanumeric index printed in black



ClearLine

Part no.	Skirt	Work volume	Format	Other features	Units/box	€	PROMO €
257047	Without skirt	200 µl	Universal	Flange around each well for easy sealing	100	268~	159 -
257048	Skirted	100 µl	Universal	For low profile blocks	100	268~	165 -
257049	Half-skirted	200 µl	Universal / ABI	With plate flanges for alignment with purification plates	100	243~	159 -



FASTGENE CLEARLINE® WHITE SEMI-SKIRTED LOW PROFILE 96-WELL PCR PLATE


ClearLine

- Ultra-thin, uniform wall for excellent heat transfer and optimum results
- Produced from ultra-pure polypropylene
- Plate compatible with LigthCycler, Biorad CFX96 and Abi stepOne Plus
- Total volume 0.2 ml, maximum working volume 0.1 ml
- Alphanumeric code



NEW

Part no.	Designation	Compatibility	€ for 50	PROMO €
257783	FastGene white semi-skirted low profile 96-well PCR plate	See on Dulis.be or Dulis.nl	261~	129 -

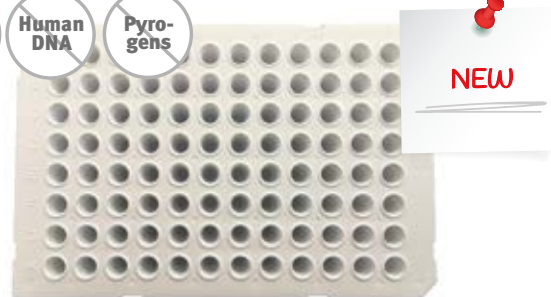

WEB TIP!

BELGIUM



NETHERLANDS



Find PCR plates **compatible with your thermal cycler** in 3 clicks using our **compatibility tool**.

<https://www.dulis.be/catalogue/selection-guide?language=en>
<https://www.dulis.nl/catalogue/selection-guide>

MOLECULAR BIOLOGY



MICROVOLUME SPECTROPHOTOMETER

For measuring the concentration of nucleic acids, proteins and bacterial cultures.

- Microvolume dosing (min. 0.5 µl) in a thermostated cuvette (37°C) with stirring function (10 to 900 rpm)
- Wavelength range: 185- 910 nm
- Intuitive control via a 7" touch screen Android operating system
- Rapid measurement, results displayed in real time
- Internal data storage (32 GB) can be exported to PC (USB/Wi-Fi)
- Microvolume photometric range: 0.04-550 A (10 mm equivalent)
- Microvolume concentration range: DsDNA [2-27500 ng/µl], BSA [0.06-820 mg/ml], IgG [0.03-400 mg/ml]
- Cell photometric range: 0-1.5 A
- Concentration limit in the cuvette: dsDNA 0.2 ng/µL; BSA 0.006 mg/ml

Part no.	Designation	€	PROMO €
865079	Spectrophotometer Nanoready Touch FC-3100 microvolume + cuvette, UV-visible	8950-	5975 -

GENERATORS



CORNING

- Compact and stackable
- Up to 4 devices can be connected simultaneously

PS250HA


- + 10 programmes can be created and saved, each containing up to 10 steps
- + Recommended for powering western blot equipment

PS300GP

- + Recommended for vertical or horizontal electrophoresis systems

Models	Axygen PS250HA	Axygen PS300GP
Max. power (W)	300, increments of 1	90
Voltage (V)	5 to 250, increments of 1	2 to 300, increments of 1
Current (mA)	10 to 3000, increments of 1	4 to 500, increments of 1
Timer (h/min)	99.99	
Pause function	Yes	
Part no.	936302	936303
€	1234-	650-
PROMO €	670 -	324 -

I AM YOUR FATHER!

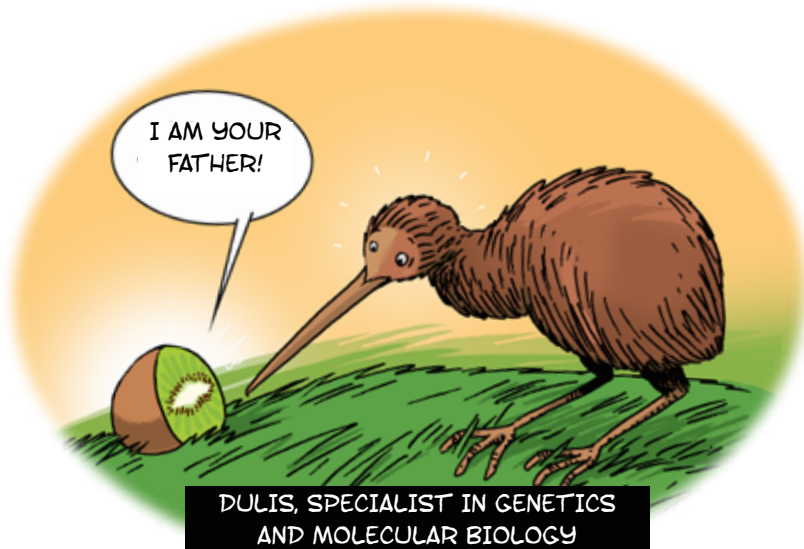

DULIS, SPECIALIST IN GENETICS AND MOLECULAR BIOLOGY

MOLECULAR BIOLOGY

HORIZONTAL ELECTROPHORESIS TANK

- Injection moulded, durable, leak-proof tank designed to minimise the volume of buffer required
- Each system is supplied with: an electrophoresis tank, a safety cover, two casting trays, two combs, deposit guides and casting walls to transform the tray into a casting system
- Many optional combs

	ClearSub MDUO
Maximum number of samples	50 ; 100
Gel size / number of trays supplied	10 x 7 cm / 1 ; 10 x 10 cm / 1
Combs supplied	2 combs of 16 teeth, thickness 1 mm
Max. number of combs per tray	2 ; 4
Typical migration condition	90 V, 45-60 minutes
Part no.	257286
€	571 -
PROMO €	374 -

ClearLine



DNA-EXITUS PLUS, DNA-EXITUS PLUS IF, RNASE-EXITUS PLUS

PanReac
AppliChem
ITW Reagents

Exitus range for decontaminating workbenches and equipment before handling in molecular biology.

- DNA Exitus for removing nucleic acids (DNA and RNA) from surfaces and equipment (pipettes, PCR hood, microtube, etc.)
- RNase Exitus plus for removing RNases from surfaces and equipment (pipettes, PCR hood, microtube, etc.)
- Contains dye to visualise treated surfaces, IF version without dye
- The two solutions can be used sequentially to eliminate DNA, RNA and RNase (DNA Exitus then RNase Exitus)

Non-corrosive,
non-toxic and environmentally
friendly solutions

more info
dolis.be / dolis.nl

dolis.be / dolis.nl



RNase-ExitusPlus - 500 ml

30 -

Part no. 049912

DNA-ExitusPlus - 500 ml

29 -

Part no. 049920

DNA-ExitusPlus - 100 ml

21 -

Part no. 049918

MICROBIOLOGY



TANKS FOR ABSORPTION SPECTROSCOPY

Hellma
Analytics
High Precision in Spectro-Optics



Hellma model	Route optical (mm)	Vol. (ml)	H x W x L ext. (mm)	W int. (mm)	Wavelength Base/ bottom thickness (mm)	Glass 360 nm - 2500 nm			SUPRASIL® QS quartz 200 nm - 2500 nm		
						Part no.	€ per cuvette	PROMO €	Part no.	€ per cuvette	PROMO €
Standard cuvettes without lid											
6030	10	3.5	45 x 12.5 x 12.5	9.5	1.5	139065A	72.70~	56 -	139066A	141.60~	100 -
High precision cuvettes with PTFE lid											
100	10	3.5	45 x 12.5 x 12.5	9.5	1.5	-	-	-	139001A	166.50~	116 -
110	10	3.5	46 x 12.5 x 12.5	9.5	1.5	-	-	-	139016A	279~	197 -

HELLMANEX CLEANING SOLUTION


Hellma
Analytics
High Precision in Spectro-Optics



Hellma cleaning solution for cleaning spectroscopy cuvettes. Use diluted to 10%.

Part no.	For photometers	€	PROMO €
139057	Hellmanex cleaning solution - 1 litre	115.80~	78 -

LABORATORY LIFT JACK

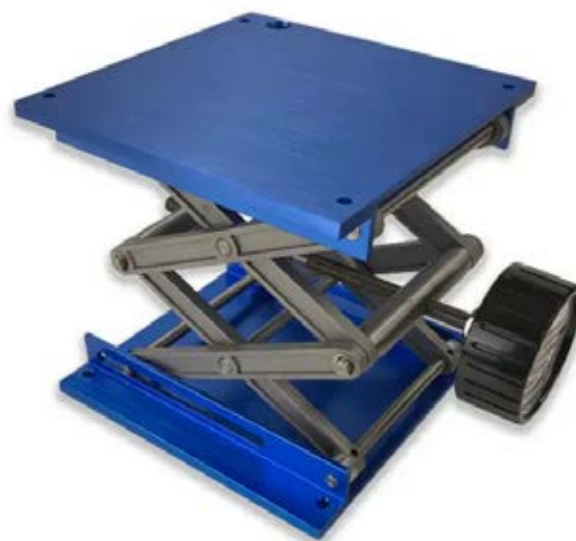

- Stainless steel for the lifting mechanism
- Anodised aluminium trays

Part no.	L x W x H (mm)	Max. load (kg)	Maxi/mini height (mm)	Pre Tapped	€	PROMO €
215051	152.4 x 152.4	27.2	273 / 62	X	532.70~	373 -



MICROBIOLOGY ANALYSIS

SEVENDIRECT SD20 BENCHTOP PH-METER

METTLER TOLEDO



- Touch screen
- Setting of protected calibration data by management levels
- Settings protected against unwanted changes by 2 management levels (administrator / user)
- Automatic data transfer to PC or printer
- New EasyPlace™ electrode holder supplied as standard

Part no.	Kit	Composition of the kit	€	€ PROMO
031722	SD20 Basic	Power supply, protective cover, operating instructions and EasyPlace™ electrode holder	1070~	823 -
031726	SD20 Kit	SD20 Basic + Inlab Expert Pro-ISM electrode and buffer solution in bag (2 of pH 4.01 / 7.00 and 9.21)	1415~	1088 -
031727	SD20 KA Kit	SD20 Basic + Inlab Routine Pro-ISM electrode and buffer solution in bag (2 of pH 4.01 / 7.00 and 9.21)	1505~	1157 -

		SD20
Measuring range	pH	-2.000 to 20.000
	mV	-2000.0 to 2000.0
	Temperature	-30.0 to 130.0 °C
Accuracy	pH	± 0.002
	mV	± 0.1 (-500.0 to 500 mV) ± 0.2 (remaining range)
	Temperature	± 0.1 (0 to 100 °C)
PH calibration	Method	Linear or segmented
	Number of points	From 1 to 5

SEVENDIRECT SD23 BENCHTOP PH / CONDUCTIVITY METER

METTLER TOLEDO



- Touch screen
- Settings protected against unwanted changes by 2 management levels (administrator / user)
- Automatic data transfer to PC or printer
- Setting of protected calibration data by management levels
- New EasyPlace™ electrode holder supplied as standard

Part no.	Kit	Composition of the kit	€	€ PROMO
031725	SD23 Basic	Power supply, protective cover, operating instructions and EasyPlace™ electrode holder with 3 slots	2255~	1734 -
031742	SD23 Kit	SD23 Basic + Inlab Expert Pro-ISM electrode, Inlab 731-ISM probe and buffer/calibration solution (2 bags of pH 4.01 / 7.00 / 9.21 / 1413 µS/cm and 12.88 mS/cm)	2835~	2180 -
031743	SD20 Pure H2O Kit	SD23 Basic + Inlab Pure Pro-ISM electrode, Inlab 741-ISM probe and buffer/calibration solution (2 bags of pH 4.01 / 7.00 / 9.21 and 84 µS/cm)	3110~	2392 -

		SD23
Measuring range	pH	-2.000 to 20.000
	Conductivity	0.000 µS/cm to 2000 mS/cm
	Salinity	0.00 to 80.00 PSU
	Resistivity	0.00 to 100.0 MΩ,cm
	mV	-2000.0 to 2000.0
	Temperature	-30.0 to 130.0 °C
Accuracy	pH	± 0.002
	Conductivity	0.5% of the measured value
	mV	± 0.1 (-500.0 to 500 mV) ± 0.2 (remaining range)
	Temperature	± 0.1 (0 to 100 °C)
PH calibration	pH	Linear or segmented method
	pH	From 1 to 5 points
	Conductivity	Linear method or manual cell constant
	Conductivity	1 or 2 points

SEVENDIRECT SD30 BENCHTOP CONDUCTIVITY METER

METTLER TOLEDO



- Touch screen
- Settings protected against unwanted changes by 2 management levels (administrator / user)
- Automatic data transfer to PC or printer
- Setting of protected calibration data by management levels
- New EasyPlace™ electrode holder supplied as standard

Part no.	Kit	Composition of the kit	€	€ PROMO
031723	SD30 Basic	Power supply, protective cover, operating instructions and EasyPlace™ electrode holder with 3 slots	1505~	1157 -
031734	SD30 Kit	SD30 Basic + Inlab 731-ISM probe and calibration solution in bag (2 bags of 1413 µS/cm and 12.88 mS/cm)	1935~	1488 -
031735	SD30 Pure H2O Kit	SD30 Basic + Inlab 741-ISM probe and calibration solution in bag (2 bags of 84 µS/cm)	2145~	1650 -

		SD30
Measuring range	Conductivity	0.000 µS/cm to 2000 mS/cm
	Salinity	0.00 to 80.00 PSU
	Resistivity	0.00 to 100.0 MΩ,cm
	Temperature	-30.0 to 130.0 °C
Accuracy	Conductivity	0.5% of the measured value
	Temperature	± 0.1 (0 to 100 °C)
Calibration	Conductivity	Linear method or manual cell constant
	Conductivity	1 or 2 points

MICROBIOLOGY ANALYSIS

JUMBO REFRIGERATOR THERMOMETERS

Traceable



- Modular thermometer
- Easy to position on any flat surface or to fix
- Triple display: Min / Max and temperature
- Alarm programmable in 1°C steps
- Delivered with Traceable certificate

Temperature range	-50 to +70 °C	
Accuracy	± 1 °C	
Probe	Bare PTFE probe	Probe in vaccine vial
Cable length (m)	3	
Part no.	999691	842142
€	171.40-	93.90-
PROMO €	64 -	71 -

TEMPERATURE RECORDER MEMORY LOC™ LOW TEMPERATURE

Traceable



- 1 million temperatures memory
- Programming steps from 1 minute to 24 hours
- Easy retrieval of recorded values
- Visual and audible alarm
- Stores the last 10 alarms
- Status indicator: battery low, memory full, data transfer via USB and alarm active

Temperature range	-0.00 to 105 °C
Accuracy	±0,2 °C
Probe	1 stainless steel probe
Cable length (m)	3
Probe Dimensions (mm)	5 x 150
Part no.	841517
€	400-
PROMO €	231 -

CHRONOMETERS

Traceable



Channel	1	4
Capacity	99 minutes 99 seconds	99 hours 59 minutes 59 seconds
Accuracy	0.01 %	0.01 %
Features	Large screen, memory, big button	Alarm, time 12/24 hours
Memory	yes	yes
Function	Countdown timer	Up/down counter
Colour	Black	White
Part no.	842232	842233
€	23-	41.70-
PROMO €	18 -	33 -

THERMOHYGROMETER

Traceable



- Min/Max functions
- Internal sensor

Temperature range	0 to 50 °C
Accuracy	± 1 °C
Humidity range	20 to 90% HR
Accuracy	± 5 %
Part number	999880
€	128.20-
PROMO €	58 -

PIPETTING DISTRIBUTION



PIPETTE CONTROLLER



ClearLine



- For plastic and glass pipettes from 0.5 to 100 ml
- Adjustable suction and delivery speeds
- Nose autoclavable at 121°C
- Supplied with charging base, wall bracket and 0.2 µm PTFE filter



Find the ClearLine® range of serological pipettes on special offer at Dulis.be or Dulis.nl

PIPET-AID® XP PIPETTE CONTROLLER



- For glass and plastic pipettes from 1 to 100 ml
- Fast, light and compact
- Adjustable suction and delivery speed to 3 speeds
- Supplied with support and nosepiece for culture with 0.2 µm double membrane filter
- Nose autoclavable at 121°C

Part no.	075002
€ for Pipet-Aid (complete with charger)	489.10 -
PROMO €	239 -



Visit Dulis.be or Dulis.nl for our range of serological pipettes

DISPENSETTE S ORGANIC



- Adjustable, dispensette rotates 360°
- Easy disassembly for cleaning
- Autoclavable at 121°C
- Supplied with adapters, certificate, suction tube and mounting key
- Ideal for dispensing organic solvents and concentrated acids (HCl and HNO₃)



100% renewable energy + 90% recycled packaging + made in Germany

Dispensed volume (ml)	Subdivision (ml)	Analogue dispenser without purge valve			Analogue dispenser with purge valve		
		Part no.	€	PROMO €	Part no.	€	PROMO €
0.5-5	0.1	090123B	363 -	275 -	090124B	417 -	315 -
1-10	0.2	090125B	363 -	275 -	090126B	417 -	315 -
2.5-25	0.5	090127B	475 -	360 -	090128B	531 -	400 -
5-50	1	090131B	522 -	395 -	090132B	565 -	425 -
10-100	1	090133B	701 -	530 -	090134B	749 -	565 -

TIPS AND MICROPIPETTES



RESEARCH PLUS MICROPIPETTES

- Lightweight pipettes, minimise handling forces without reducing robustness
- Fully autoclavable without disassembly

ep Research® plus Pack 4	
Includes	1 Research plus 0.1 - 2.5 µl
	1 Research plus 0.5 - 10 µl
	1 Research plus 2 - 20 µl
	1 Research plus 10 - 100 µl
	1 Research plus 20 - 200 µl
	1 Research plus 100 - 1000 µl
	6 epTips box Carousel rack for 6 micropipettes
Part no.	934697
€	1577-
PROMO €	1450 -

The ideal pipette starter pack to handle your liquids!



eppendorf

XPLORER® AND XPLORER® PLUS ELECTRONIC MICROPIPETTES

- Light and balanced
- Tip-holder end with shock absorber

Intuitive operation

- + Pipetting mode selection wheel
- + Adjustable parameters on 1 screen
- + French texts with help function
- + Large backlit display
- + User settings and predefined settings
- + Lithium-Polymer battery with long autonomy (3000 pipettings), possibility to work while recharging
- + Same charger (and charger holder) as for the Multipette Stream/Xstream
- + Integrated RFID chip provides simple identification and documentation
- + Supplied with charging adapter and calibration certificate according to EN ISO 8655

Two versions

- + Xplorer®: comfort and repeatability for everyday liquid dispensing applications
- + Xplorer® plus: can be used for all the most sophisticated liquid dispensing applications and can also be used to program a complete process; has an internal clock with reminders for service and metrological checks

Eppendorf Xplorer® and Xplorer® plus single-channel micropipettes - charger incl ed

Volume (µl)	Colour push button	Xplorer®			Xplorer® plus		
		Part no.	€	PROMO €	Part no.	€	PROMO €
0.5 - 10	Grey	035639	700-	630 -	035813	831-	750 -
1 - 20	Light grey	934305	700-	630 -	934308	831-	750 -
5 - 100	Yellow	035640	700-	630 -	035814	831-	750 -
10 - 200	Yellow	934306	700-	630 -	934309	831-	750 -
15 - 300	Orange	035641	700-	630 -	035815	831-	750 -
50 - 1000	Blue	035642	700-	630 -	035816	831-	750 -
250 - 2500	Red	934307	700-	630 -	934310	831-	750 -
500 - 5000	Purple	035643	700-	630 -	035817	831-	750 -
1000 - 10,000	Turquoise	035644	700-	630 -	035818	831-	750 -

Eppendorf Xplorer® multichannel micropipettes - charger included

Volume	Colour push button	8 channels			12 channels		
		Part no.	€	PROMO €	Part no.	€	PROMO €
0.5 - 10 µl	Grey	035645	1034-	930 -	035646	1212-	1040 -
5 - 100 µl	Yellow	035647	1034-	930 -	035648	1212-	1040 -
15 - 300 µl	Orange	035649	1034-	930 -	035650	1212-	1040 -
50 - 1200 µl	Green	035651	1034-	930 -	035812	1212-	1040 -



MICROPIPETTES

EPENDORF PIPETTE MANAGER

- Stand-alone control panel with touch screen for remote setting of electronic pipettes, easy handling of difficult liquids and digital documentation of pipetting steps
- For Eppendorf Xplorer®, Eppendorf Xplorer® plus and Move It® electronic micropipettes
- Touch screen for quick entry of pipetting volumes and speeds, settings are instantly transferred to connected pipettes, ready for use without pre-programming
- Automatically selects the best parameters for handling viscous, volatile or other difficult liquids
- Pipetting steps are automatically logged and data can be exported in PDF format via USB

Part no.	Designation	€	PROMO €
934736	VisioNize pipette manager	1065-	965 -



CLEARLINE® MICROPIPETTES

- Adjusting the height of the ejection system
- Volume lock
- Fully autoclavable
- UV-resistant

Single-channel micropipettes

Volume (µl)	Colour code	Part no.	€	PROMO €
0.1 - 2	Red	257029	233-	119 -
0.5 - 10	Red	257030	233-	119 -
2 - 20	Yellow	257031	222-	119 -
10 - 100	Yellow	257032	225-	119 -
20 - 200	Yellow	257033	222-	119 -
100 - 1000	Blue	257034	222-	119 -
500 - 5000	White	257035	233-	119 -
1000 - 10000	White	257036	233-	119 -



Multi-channel micropipettes

Volume (µl)	Colour code	8 channels			12 channels		
		Part no.	€	PROMO €	Part no.	€	PROMO €
1 - 10	Red	257037	404-	339 -	257041	623-	399 -
0.5 - 10	Yellow	257038	565-	339 -	257042	623-	399 -
20 - 200	Yellow	257039	571-	339 -	257043	623-	399 -
50 - 300	Green	257040	565-	339 -	257044	623-	399 -

UNIVERSAL TWISTER RACK FOR 6 PIPETTES

- For 6 pipettes of all brands
- Easy rotation of the entire rack by rotating the base with the finger
- Very stable
- Anti-slip pads
- Coloured rack, can be removed from the stand and easily cleaned with detergent and water

Ruby Red	€	PROMO €
061795	178.60-	109 -



MICROPIPETTES

PIPETMAN® L

- Lightweight, ergonomic design and low pipetting force
- Adjustable ejector to suit left- and right-handed users
- Volumetric locking mechanism
- 2D traceability code for easy tracking during handling and maintenance
- Fully autoclavable without disassembly



GILSON

PIPETMAN® L - Single channel

Volume (µl)	Suitable tips	Increment (µl)	Plastic ejector			Metal ejector		
			Part no.	€	€ PROMO	Part no.	€	€ PROMO
0.2 - 2	D(F)(L)10	0.002	070053	343-	239 -	070047	343-	239 -
0.5 - 10		0.02	070054	343-	239 -	070048	343-	239 -
2 - 20	D200, DF30	0.02	070055	343-	239 -	070049	343-	239 -
10 - 100	D200, DF100	0.2	070056	343-	239 -	070050	343-	239 -
20 - 200	D(F)200, D(F)300	0.2	070057	343-	239 -	070051	343-	239 -
100 - 1,000	D(F)1000, D(F)1200	2	070058	343-	239 -	070052	343-	239 -
500 - 5,000	D5000	2	070059	343-	239 -	-	-	-
1,000 - 10,000	D10 ml	20	070060	343-	239 -	-	-	-

Available with ISO 17025 calibration certificate (Cofrac approved).



PIPETMAN® L - Multichannel

Volume (µl)	Suitable tips	Increment (µl)	8 channels			12 channels		
			Part no.	€	€ PROMO	Part no.	€	€ PROMO
0.5 - 10	D(F)(L)10	0.02	070063	965-	669 -	070064	1117-	779 -
2 - 20	D(F)L10, D200, DF30	0.02	070065	965-	669 -	070066	1117-	779 -
20 - 200	D(F)200, D(F)300	0.2	070067	965-	669 -	070068	1117-	779 -
20 - 300		0.2	070069	965-	669 -	070070	1117-	779 -
100 - 1200	D(F)1200	2	067538	1263-	699 -	067536	1161-	799 -

Available with ISO 17025 calibration certificate (Cofrac approved) (add a C behind the ref.).

MICROMAN® E GILSON

Positive displacement micropipettes with disposable capillary pistons (CPs), particularly suitable for difficult liquids.

- Ideal for viscous, volatile, dense, contaminated or hazardous samples
- Elimination of any risk of contamination by aerosols (disposable CP)
- Volume lock system

Type	Volume	Part no. MICROMAN E®	€	€ PROMO
M10	1 - 10 µl	070089	430-	249 -
M25	3 - 25 µl	070090	430-	249 -
M50	20 - 50 µl	070091	430-	249 -
M100	10 - 100 µl	070092	430-	249 -
M250	50 - 250 µl	070093	430-	249 -
M1000	100 - 1000 µl	070094	430-	249 -

MICROMAN® E

- Large push button for pipetting easier.
- New shape for better grip.
- PVDF handle, highly resistant to chemical attack.
- Blocking volume for safe pipetting.
- "QuickSnap" device for quick attachment of the CP capillary.
- No contamination of the pipette by aerosols or vapours (disposable CP).

MADE IN EUROPE logo, 1 YEAR WARRANTY logo, and GILSON logo are also present.

On our website, you will find a wide range of filter and non-filter tips compatible with all brands of micropipettes.

MICROPIPETTES

PICUS 2 ELECTRONIC PIPETTES

SARTORIUS



- Advanced electronic ejection system reduces muscle tension in the hand
- The Tracker function ensures precise microplate dispensing by indicating the next well to be dispensed on a 96- or 384-well plate
- Advanced functions: multiple dispensing, multiple aspiration, reverse pipetting, sequential dispensing, manual pipetting, dilution, titration
- Lithium-polymer batteries, charging time 1 hour
- Ability to continue working while charging via microUSB cable
- Charger or charging rack to be ordered separately

Picus 2 single-channel micropipettes

Volume (µl)	Increment (µl)	Part no.	€	€ PROMO
0.2 - 10	0.01	070489	885-	660 -
5 - 120	0.1	070490	885-	660 -
10 - 300	0.2	070491	885-	660 -
50 - 1000	1	070492	885-	660 -
100 - 5000	5	070493	885-	660 -
500 - 10000	10	070494	885-	660 -

Picus 2 multichannel micropipettes

Volume (µl)	Increment (µl)	8 channels			12 channels		
		Part no.	€	€ PROMO	Part no.	€	€ PROMO
0.2 - 10	0.01	070495	1418-	1060 -	070499	1658-	1240 -
5 - 120	0.1	070496	1418-	1060 -	783501	1658-	1240 -
10 - 300	0.2	070497	1418-	1060 -	783502	1658-	1240 -
50 - 1,200	1	070498	1418-	1060 -	783503	1658-	1240 -

MULTIPETTE® M4 MICROPIPETTE



eppendorf

- Automatic recognition of the Combitip with display of the selected volume
- Dispensing counter displayed on the screen
- Optimized grip to fit all body types, suitable for both left and right handed users

Part no.	Designation	€	€ PROMO
933049	Multipette® M4 with holder (wall-mounted, for pipettes)	420-	390 -

DISPENSING PIPETTES



2 versions:


- + HandyStep® Touch: pipetting, multi-dispensing and automatic dispensing functions ;
- + HandyStep® Touch S: all the functions of HandyStep® Touch, plus sequential dispensing, multi-aspiration and titration.

- Touch screen with intuitive interface
- Automatic detection of DD-Tips II
- Automatic tip ejection

Part no.	Designation	€	€ PROMO
042443	Handystep® Touch complete	882-	680 -
042444	Handystep® Touch S complete	1107-	850 -

WEB TIP!

BELGIUM



NETHERLANDS



Find the **tips compatible** with your **micropipette** with the **compatibility tool**.

<https://www.dulis.be/catalogue/selection-guide?language=en>
<https://www.dulis.nl/catalogue/selection-guide>

TUBES RACKS



MODULAR MULTI-TUBE RACKS

- Modular racks with different independent, articulated and movable inserts to accommodate different types of pipe
- Autoclavable
- One base supplied with 2 inserts for 20 tubes of diameter 10-13 mm, 2 inserts for 20 tubes of diameter 13-17 mm, and 2 inserts for 6 tubes of diameter 25-30 mm




Part no.	Number of racks included	Ø of wells	No. of wells	Colour	€	€ PROMO
320757	2	17 mm	20	Blue	71.70~	28 -
320758	2	17 mm	20	Purple	71.60~	28 -

RACKS FOR MICROTUBES

- Made of polypropylene
- 80 holes
- Autoclavable

White	Blue	Green	Red	Purple	€/ box	PROMO €
330136	330137	330138	330139	330140	13.90~	2.20 -

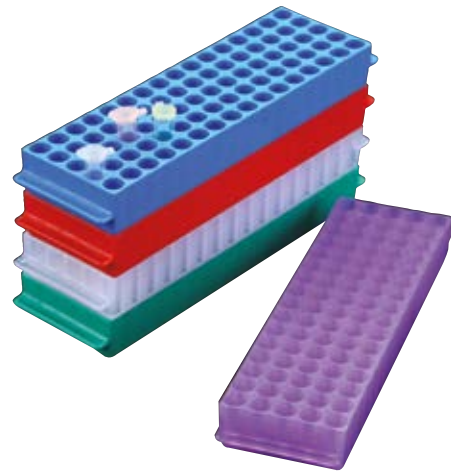

MULTI-SIDED REVERSIBLE RACKS

- Made of autoclavable polypropylene

4 sides for:

- + 32 x 0.5 ml microtubes
- + 32 x 1.5 ml microtubes or 12 mm ø tubes
- + 12 x 15 ml conical tubes, 17 mm ø
- + 4 x 50 ml conical tubes, 30 mm ø

5 mixed colours	037565
€ per 5	145.80~
PROMO €	34 -



WEB TIP!

BELGIUM



NETHERLANDS



Give your **tip racks** a new life by joining our **recycling service** funded by **Dulis!**

<https://www.dulis.be/about/csr/environment?language=en>

<https://www.dulis.nl/about/csr/environment>



CRYOGENICS



WHITE CARDBOARD CRYOBOXES

ClearLine




- In Hydrophobic cardboard
- With dividers mounted in the box
- Min. temperature: -196 °C
- Dimension: 133 x 133 x 51 mm

Part no.	Capacity	€	€ PROMO
972015	81 cryotubes	6~	1.40 -
972016	100 microtubes	6~	1.40 -

POLYCARBONATE CRYOBOXES

ClearLine

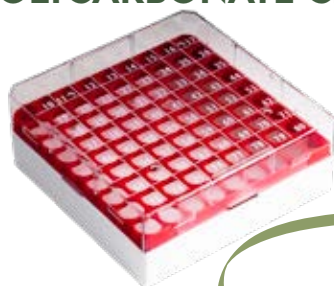

For 81 cryotubes
1 and 2 ml



1/3 solar energy
+ recycled cardboard packaging
+ made in Europe

- Transparent lid, with digital marking
- Can be used from - 196 °C to + 121°C , autoclavables 20 min
- Frosted marking area (box and lid)

For	81 cryotubes 1 and 2 ml
Dim. (mm)	132 x 132 x 52
Blue	390479
Yellow	390697
Red	390480
Green	390481
€	5.80~
PROMO €	4 -

POLYPROPYLENE FREEZER BOXES



- Double holding grid included
- Digital location marking
- Ext. Dim. W x L x H: 133 x 133 x 128 mm, internal height: 125 mm

Yellow	Blue	Green	Red	€	€ PROMO
Freezer boxes for 15 ml tubes: for 5 x 5 tubes of 17 mm Ø					
142963	142964	142965	142966	21.70~	8.50 -
Freezer boxes for 50 ml tubes: for 3 x 3 tubes of 30 mm Ø					
142976	142977	142978	142979	21.70~	8.50 -

BELGIUM



NETHERLANDS



WEB TIP!

Find out more about our **ClearLine cryotubes** at the following link:

<https://www.dulis.be/product-group/01-clearline-cryotubes?language=en>

<https://www.dulis.nl/product-group/01-clearline-cryotubes>

REFRIGERATED RACKS FOR MICROTUBES

Reversible benchtop refrigerated racks for 20 x 1.5 ml microtubes on one side or 0.5 ml on the other side. Unbreakable polycarbonate, filled with a non-toxic gel.

Two models:

- + White colour: storage at 0 °C for 5 hours
- + Blue: storage between -10°C and -20°C for up to 3 hours


Part no.	Designation	€	€ PROMO
045489	White rack 0 °C	248~	79 -
045490	Blue rack -20 °C	180~	79 -



ISOFREEZE PCR RACKS

- Maintains the temperature of heat-sensitive samples at a stable +4°C for 4 hours
- Change colour as they warm up
- The gel contained is non-toxic and non-hazardous
- Racks for 0.5, 1.5 or 2 ml tubes

Part no.	Designation	Units/box	€	€ PROMO
840401	Rack Isofreeze 24 tubes - green to yellow	1	132.80~	61 -
840400	Rack Isofreeze 24 tubes - purple to pink	1	141.60~	61 -

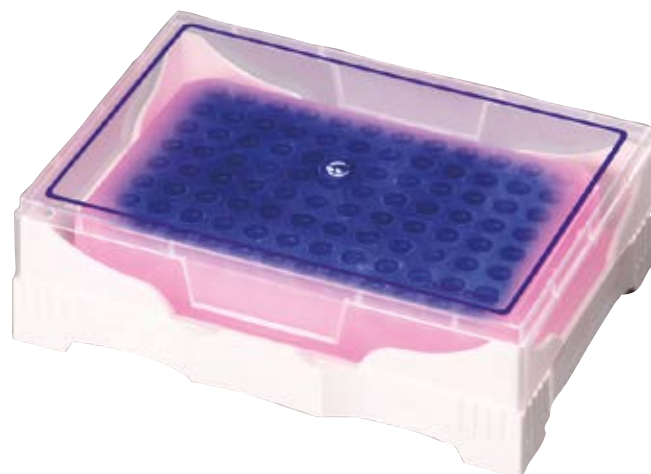

TRANSPORT DEWARs

3.3DIN/ISO 3585 borosilicate glass inner bulb

- For storing and transporting LN2, CO2 and other cooling liquids
- Operating temperature range -200°C to +200°C
- The glass bulbs are silver-plated and vacuum-insulated
- Carrying handle on the case, closing clamps and lid
- Can be used with liquid nitrogen by piercing the lid (hole Ø 2 mm approx.)

Volume	Ext. ø x H (mm)	Int. ø x H (mm)	Aluminium			Stainless steel		
			Part no.	€	€ PROMO	Part no.	€	€ PROMO
1	100 x 150	120 x 215	091353	397~	223 -	091357	368~	229 -
2	138 x 170	160 x 245	091354	415~	253 -	091358	445~	287 -
3	138 x 230	160 x 305	091355	547~	311 -	091359	595~	368 -
4	138 x 310	160 x 382	091356	681~	383 -	091360	718~	430 -



PLASTIC



AZLON® BEAKERS WITH SPOUT



- Autoclavable at +121°C
- Excellent chemical resistance
- Translucent polypropylene beakers with screen-printed blue graduations

Part no.	Vol. (ml)	Graduations (ml)	Int. ø (mm)	Ext. Ø (mm)	Height (mm)	Units/box	€/box	€ PROMO
232485	10	1	-	32	32	10	25-	9 -
090040	25	5	35	41	51	1	3.60-	1 -
090041	50	10	39	50	61	1	4-	1.25 -
090042	100	20	48	61	73	1	4.30-	1.30 -
090043	250	50	65	80	96	1	5.40-	2 -
785381	400	50	-	94	95	10	50.90-	21 -
232486	600	50	-	106	107	-	43.30-	15 -
090045	1000	100	99	120	148	1	12.30-	4 -
090046	2000	200	125	163	188	1	22.30-	7 -



RECYCLED PERFORATED CRATES



- In recycled HDPE
- Approved for food contact
- For storing ingredients
- Integrated handle
- Green colour

Part no.	Volume (l)	Dimensions (L x W x H) (mm)	€	€ PROMO
212201	15	600 x 400 x 135	66.70-	17 -
212202	40	600 x 400 x 200	80-	20 -
212203	60	600 x 400 x 300	100-	25 -



STRAIGHT PIPE FITTINGS



Part no.	For pipes inn. Ø (mm)	Material	Units/box	€/box	€ PROMO
781897	5 - 17	PP	10	34.40-	27.50 -
042390	3 - 5	PP	10	19.90-	15.90 -
042388	6 - 10	PP	10	21-	16.80 -
042389	9 - 13	PP	10	20.40-	16.30 -

REDUCING FITTINGS FOR PIPES




Part no.	For pipes inn. Ø (mm)	Material	Units/box	€/box	€ PROMO
781998	8 - 10 / 11 - 14	HDPE	10	24.90-	19.90 -
781999	12 - 14 / 18 - 20.5	HDPE	10	26.40-	21.10 -
781753	3 - 5 / 6 - 10	PP	10	3-	2.40 -
782001	6 - 10 / 9 - 13	PP	10	16.30-	13 -

3-WAY HOSE FITTINGS



For pipes inn. Ø (mm)	Material	Units/box	Type Y			Type T		
			Part no.	€/box	€ PROMO	Part no.	€/box	€ PROMO
3	PP	20	042385	26.70-	21.40 -	042574	22.10-	17.70 -
4 - 5	PP	20	782004	26.70-	21.40 -	782005	18.70-	15 -
6 - 7	PP	20	042386	37.20-	29.80 -	782006	23.50-	18.80 -
8 - 9	PP	20	042387	44.80-	35.80 -	782007	24.70-	19.80 -
10 - 11	PP	20	042391	45.10-	36.10 -	782008	26.70-	21.40 -

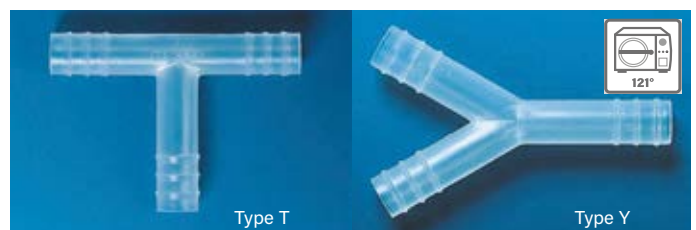

FILTRATION & CHEMISTRY



1PS PHASE SEPARATION PAPERS



Hydrophobic filter paper retaining aqueous phases and allowing organic phases to pass through. Ideal replacement for conventional decanter bulbs.

Part no.	Diameter (mm)	€ for 100	PROMO €
2200090	90	56~	40.20 -

SAFETY PLUG

Safety Waste Caps V3.0 Lisa

- 360° rotating PTFE head for easy tubing changes without twisting the tubes
- Supplied with 4 PFA connectors for ext. Ø capillaries, 1.6 to 3.2 mm
- Supplied with 3 PP fittings for 5 to 11.5 mm inner diameter pipes
- GL14 connector for vent filter
- Supplied with 9 plugs
- To be completed with a V3.0 vent filter 959509

Thread	Part no.	Part no. SCAT	€ per unit	PROMO €
GL45	959566	350045	168.40~	137 -

To be completed with one of the vent filters

Part no.	Part no. SCAT	Size	Maximum service life	€ per unit
959508	410534	S	3 months	71.30 -
959509	410535	M	6 months	109.30 -
959425	407986	L	12 months	151.80 -



Safety Waste Caps V3.0 Lisa

HPLC FEEDING AND WASTE MANAGEMENT KIT



- Supplied with 4 1-litre glass bottles, safety caps and vent
- Supplied with 1 x 5-litre canister, safety cap and vent filter

Part no.	Designation	€	PROMO €
959546	Complete HPLC waste recovery set	605~	525 -

HPLC IV STARTER KIT



- 4 plugs GL45 4-way
- 4 vent filters with label
- 3 x 12 connections 1.6/2.3/3.2 mm
- 8 plugs for unused capillary lines

Part no.	Part no. SCAT	€	PROMO €
496479	399203	388~	292 -

GLASSWARE



BOTTLES



- Made of high quality borosilicate glass 3.3 according to ISO 3585
- ISO 4796-1
- With blue polypropylene cap and drip-free spill ring
- Excellent chemical and thermal resistance

Part no.	Volume (ml)	ø x h (mm)	Units/box	€/box	PROMO €
257063	100	56 x 100	10	26.70→	19 -
257064	250	70 x 138	10	40→	25 -
257065	500	86 x 176	10	45→	30 -
257066	1000	101 x 225	10	65.30→	40 -
257067	2000	136 x 260	10	216→	80 -

GLS 80 DURAN® WIDE-NECK GLASS BOTTLES



- Wide-mouth bottles with 80 mm thread for easy handling
- Excellent transparency, graduated, inert and chemically resistant
- Supplied complete with PP caps (with lip seal for better sealing) and ring
- Certificate and batch tracking: using the special 8-digit code on the bottle, a certificate can be obtained directly from the Internet

		Clear glass			
Volume (l)	Part no.	Units/box	€/box	PROMO €	
0.25	092135	10	167.60→	119 -	
0.5	091701	10	220→	158 -	
1	091702	10	303→	204 -	
2	091703	10	674→	407 -	
3.5	092073	1	195.30→	120 -	
5	091704	1	247→	168 -	
10	091705	1	484→	308 -	
20	091706	1	988→	668 -	

DURAN PROTECT + BOTTLES



- Glass bottle USP/EP Type I 3.3: guaranteed inertia
- Polyamide coating on the outside to reduce the risk of glass breakage and liquid splashes in the event of breakage
- The coating is cleanroom certified (Fraunhofer IPA TESTED DEVICE®), FDA certified and EU food contact safe
- Protective coating for a better, safer grip
- Supplied with dust cap

		Clear glass				Amber glass			
Volume (ml)	Thread	Part no.	Units/box	€/box	PROMO €	Part no.	Units/box	€/box	PROMO €
25	GL25	442830	10	364→	186 -	442841	10	713→	365 -
50	GL32	442831	10	367→	188 -	442842	10	721→	369 -
100	GL45	442829	10	537→	204 -	442843	10	721→	369 -
250	GL45	442832	10	422→	216 -	442844	10	940→	481 -
500	GL45	442833	10	501→	256 -	442845	10	1166→	596 -
1000	GL45	442834	10	690→	353 -	442846	10	1515→	775 -
2000	GL45	442835	6	765→	391 -	442847	6	1400→	716 -
3500	GL45	442836	1	491→	251 -	-	-	-	-
5000	GL45	442837	1	648→	332 -	442848	1	853→	436 -

GLASSWARE

AUTOCLAVABLE BOTTLE WITH SNAP-ON CAP

- Type I glass bottle in accordance with USP, EP (3.2.1) and JP, ASTM E438, type I, class A
- The cap allows steam to escape during the autoclave cycle
- Reusable cap 10 cycles
- Retrace code
- Double graduated scales, easy to read to indicate either the volume of liquid contained or the volume poured



Part no.	Designation	Packaging	€	PROMO €
097025	2l bottle	1	45.50~	35 -

BLUE AUTOCLAVABLE POLYPROPYLENE CAPS

- Dry heat sterilisable at 180°C



Part no.	Thread	Units/ bag	€/ box	PROMO €
090320	GL25	10	22.10~	15.50 -
090321	GL32	10	24.60~	15.20 -
090311	GL45	10	32.40~	18.20 -

SHORT-NECK GROUND FLASKS

- QuickFit® honing
- Short neck

- Borosilicate glass
- Round bottom



673985



Single-necked flasks

Part no.	Vol. (ml)	Socket	Units/ box	€/ box	PROMO €
673983	500	19/26	5	158.40~	72.50 -
673984	500	24/29	5	147.80~	84.70 -
673985	500	29/32	5	147.80~	87.30 -
673988	1000	24/29	2	77.60~	39.70 -
001883	1000	29/32	2	116.40~	45.70 -

Double-necked flasks

- A central collar and a slanted collar

Part no.	Vol. (ml)	Central honing	Lateral honing	H. (mm)	€	PROMO €
991549	50	14/23	14/23	89	56.60~	41.60 -
991550	100	24/29	14/23	110	43.40~	35.70 -
991551	100	24/29	19/26	110	43.40~	35.70 -
991552	250	24/29	14/23	130	47.90~	39.30 -
991553	250	24/29	19/26	130	56.60~	41.60 -
991555	500	24/29	19/26	150	56.60~	41.60 -

Three-necked flasks

- One central collar and 2 slanted collars
- Oblique side pipes

Part no.	Vol. (ml)	Central honing	Lateral honing	Units/ box	€/ box	PROMO €
991581	100	24/29	14/23	1	65.10~	53.50 -
991583	250	19/26	19/26	1	79.50~	65.40 -
991586	250	29/32	14/23	1	79.50~	65.40 -
991591	500	24/29	19/26	1	79.50~	65.40 -
991593	500	29/32	19/26	1	72.20~	59.50 -

GLASSWARE

BOROSILICATE GLASS BEAKERS



- Made of high quality borosilicate glass
- With white scales and marking area
- Excellent chemical and thermal resistance



Part no.	Volume (ml)	ø x h (mm)	Units/box	€/box	PROMO €
257055	25	34 x 50	12	36.30~	18 -
257056	50	42 x 60	12	32.80~	17 -
257057	100	50 x 70	12	41.40~	17 -
257058	150	60 x 80	12	45.30~	22 -
257059	250	70 x 95	12	43.40~	19 -
257060	400	80 x 110	12	45.20~	22 -
257061	600	90 x 125	6	33.40~	17 -
257062	1000	105 x 145	6	32.70~	17 -

LOW-FORM PYREX® BEAKERS



- Equipped with a pouring spout
- Borosilicate glass



Part no.	Volume (ml)	Out. ø (mm)	Height (mm)	Units/box	€/box	PROMO €
090032	50	42	60	1	10.40~	5.60 -
090033	100	50	70	1	10.60~	5.50 -
090130	150	60	80	1	10.50~	5.80 -
090034	250	70	95	1	11.20~	6 -
090035	400	80	110	1	13.80~	7.20 -
090036	600	90	125	1	17~	9 -
090037	800	100	135	1	23.40~	12.40 -
090038	1000	105	145	1	26.70~	14.30 -
090039	2000	130	185	1	48~	24.90 -

PYREX® ERLLENMEYER FLASKS FOR INTENSIVE USE



Graduated Erlenmeyer flasks, narrow neck, for intensive use.

- High shock resistance thanks to consistent thickness of walls and bottom; neck is also reinforced with a thick rim
- Perfectly flat base for optimised stirring



Cat. No.	Vol. (ml)	Body outer ø (mm)	Out. ø Neck (mm)	Int. ø Neck (mm)	Height (mm)	Units/box	€/box	PROMO €
231920	10	31	17	12	50	12	329~	163 -
231928	25	41	21	14	65	12	291~	150 -
231933	50	51	22	15	78	12	276~	153 -
231942	125	67	28	24	114	12	245~	140 -
231947	250	82	32	28	132	12	219~	122 -
231954	500	101	37	32	176	6	129.80~	72.70 -
231960	1000	129	47	40	216	6	217~	115 -
231965	2000	160	50	43	268	1	93.70~	35.50 -

BLAUBRAND® AMBER CLASS A VOLUMETRIC FLASKS



- Consistent BLAUBRAND® quality
- Class A
- Certified as compliant
- In DURAN®, DIN EN ISO 1042
- Batch certificate delivered per packaging unit
- Smooth neck with square polypropylene stopper with drip tip (this stopper greatly reduces the risk of breakage in the event of spillage and prevents the vial from rolling onto the bench), or with glass stopper



Part no.	Vol. (ml)	Tolerance (+/-ml)	Units/box	Cap	€/box	PROMO €
781698	5	0.04	2	10/19	77~	37.60 -
781699	10	0.04	2	10/19	77~	37.60 -
781700	20	0.04	2	10/19	76.60~	37.40 -
145606	20	0.04	2	12/21	81.30~	40 -
145607	25	0.06	2	12/21	81.30~	40 -
674399	25	0.04	2	10/19	93.80~	37.40 -
781702	50	0.06	2	12/21	80.30~	39 -
781701	50	0.1	2	14/23	81.10~	40 -
781703	100	0.1	2	14/23	80.20~	39.80 -
781704	200	0.15	2	14/23	103.60~	49.40 -
781705	250	0.15	2	14/23	113.90~	54.80 -
781706	500	0.25	2	19/26	139.60~	68.60 -
781707	1000	0.4	1	24/29	99.20~	53.10 -

LARGE-VOLUME GLASSWARE
AT SPECIAL PRICES? VISIT
DULIS.BE OR DULIS.NL

HEALTH AND SAFETY



Only the use of several gloves will effectively protect you from the various risks encountered in the laboratory. SHIELD Scientific presents a simple, three-colour system to make your choice easier:



HIGH CHEMICAL RISKS

Double-layer bi-material gloves, meeting chemical risk standards: protection without sacrificing comfort.



HIGH BIOLOGICAL RISKS

Gloves that meet biohazard standards. Maximum safety for both the user and his handling.



RISKS IN EVERYDAY LIFE

Latex or nitrile gloves, the thickest of the thin gloves on the market. Designed for everyday use, they meet the latest PPE standards. A special effort to respect the environment has been made in the manufacture and packaging of EcoSHIELD gloves.

more products
dulis.be / dulis.nl

SHIELDSKIN CHEM™ NEO NITRILE™ GLOVES 300 MM



- Bi-materials: nitrile/neoprene bilayer (white inside, red outside), TwinSHIELD™ double dip technology
- Length 300 mm; palm thickness: 0.31 mm
- Biohazard: AQL 0.25 above standard - level 3
- Chemical risk: Type A (AJKLNPT)

XS/6	S/7	M/8	L/9	XL/10	XXL/11	Units/box	€/box	PROMO €
065809	065810	065811	065812	065813	065814	40	62.80→	35 -

The 1st chemical protection glove!

SHIELDSKIN™ ORANGE NITRILE™ 260 GLOVES



- Bi-materials: nitrile/neoprene bilayer (white interior, orange exterior), TwinSHIELD™ double dip technology
- No vulcanisation accelerator to limit allergic phenomena
- Length 260 mm; palm thickness: 0.14 mm
- Biohazard: AQL 0.25 above standard - level 3
- Chemical hazard: type B (JKPT)

SHIELDSKIN™ ORANGE NITRILE™ gloves 260 mm

Size	XS/6	S/7	M/8	L/9	XL/10	Units/box	€/box	PROMO €
Part no.	065700	065701	065702	065703	065704	90	29.20→	14.90 -

SHIELDSKIN™ ORANGE NITRILE™ gloves 300 mm

Size	XS/6	S/7	M/8	L/9	XL/10	Units/box	€/box	PROMO €
Part no.	065705	065706	065707	065708	065709	50	24→	12.90 -

ECOSHIELD™ PF 250 GLOVES



- Dual-layer nitrile (white inside, green outside)
- TwinSHIELD™ technology
- Length 250 mm (size XL/10 = 260 mm); palm thickness: 0.10 mm
- Biohazard: AQL 0.25 (above standard) - level 3
- Chemical risk: Type B (KPT)


EcoSHIELD™ Eco Nitrile PF 250 Gloves

Size	XS/6	S/7	M/8	L/9	XL/10	Units/box	€/box	PROMO €
Part no.	065744B	065745B	065746B	065747B	065825B	150	33.80→	17.90 -

HEALTH AND SAFETY

CRYOGLOVES

- Very soft gloves
- Can be used from - 196 °C to + 150 °C
- Length 40 cm



cryokit
HYGIENIC PROTECTION



T.8	T.9	T.9	€ / per pair	PROMO €
005206	005207	005208	184.50~	110 -

MEDICAL MASK WITH ELASTICS



Recycled packaging and recyclable + renewable energy

- Type IIR medical mask with ear elastics
- Anatomical folding
- High breathability and comfort
- Non-irritant, non-sensitising

Part no.	Designation	€ per box of 50	PROMO €
475400	Medical OP'R type IIR mask	10.40~	5 -

RESPIRATORY PROTECTION MASKS



- FFP2 protective masks and type IIR medical masks
- Without staples
- High breathability and comfort
- Non-irritant, non-sensitising

Part no.	Filtration level	Packaging	€ per box of 50	PROMO €
475349	FFP2 NR D	Individual bag	25.10~	15 -

DISPENSER FOR PLEATED MASKS



- Dispenser for pleated masks
- Fixing with screws and plugs included, magnetic fixing option

Part no.	Model	Material	Dimensions (mm)	€	PROMO €
022417	Stainless steel 304	For 1 box of surgical masks	185 x 105 x 105	71.60~	45 -

AUTOMATIC DISPENSER FOR OVERSHOES



- In ABS
- Quick and easy to put on overshoes

Part no.	Designation	Dimensions (mm)	€	PROMO €
022439	ABS automatic dispenser for overshoes	205 x 400 x 120	173.30~	68 -

Overshoes

Part no.	Model	€	PROMO €
022445	Blue PE overshoes for dispenser	39.10~	12 -

FACE SHIELD



- Large panoramic polycarbonate visor (20.5 x 39.4 cm) for complete facial protection
- Height- and depth-adjustable headrest

Part no.	Designation	€	PROMO €
270082	SPHERE face shield	39.20~	19.50 -

OVERGLASSES



- Clear polycarbonate lens
- Platinum anti-fog treatment
- Wide frame with protective side shell
- Adjustable arms

Part no.	Designation	€	PROMO €
270028	SQUALE overglasses	109.90~	58 -

BRUSHES

- Nylon
- Aluminium handle

Part no.	Length (mm)	Min. tube Ø (mm)	Max. tube Ø (mm)	€/box	PROMO €
114120	600	7	14	20.90~	17 -
114121	1100	7	14	31.50~	25 -
114122	1600	7	14	40~	32 -
114123	2100	7	14	45.10~	36 -
114124	600	15	30	21.90~	18 -
114125	1100	15	30	32.60~	26 -
114126	1600	15	30	40~	32 -
114127	2100	15	30	43.50~	35 -
114128	600	30	45	20.90~	17 -
114129	1100	30	45	32.60~	26 -
114130	1600	30	45	40~	32 -
114131	2100	30	45	43.50~	35 -



STAINLESS STEEL TROLLEYS

- 4 corner stops
- 4 anti-noise swivel castors Ø 100 mm, 2 of which have brakes
- Load capacity: 250 kg/trolley and 80 kg/shelf



Part no.	Ext. dimensions L x W x H (mm)	Number of trays	€	PROMO €
540160	850 X 540 x 940	2	250~	87 -
540161	850 X 540 x 940	3	297~	106 -
540162	710 X 410 x 810	2	204~	82 -
540163	710 X 410 x 810	3	237~	96 -

MULTIPURPOSE PLASTIC TROLLEYS

- Aluminium frame and thick polypropylene trays
- Load capacity per trolley: 250 kg
- 4 wheels Ø 100 mm, 2 of which have brakes
- Double ball bearing wheels
- Delivered unassembled, easy to assemble



No. of trays	Dimensions (W x L x H) (mm)	Black			Grey		
		Part no.	€	PROMO €	Part no.	€	PROMO €
2	850 x 480 x 950	-	-	-	040182	303~	184 -
3	850 x 480 x 1000	-	-	-	040183	353~	241 -
2	1100 x 520 x 950	040180	353~	215 -	040184	373~	223 -

HEALTH AND SAFETY

FIXED HEIGHT 304 STAINLESS STEEL TABLE

- Ergonomic workstation, suitable for seated or standing work
- Stainless steel cylinders
- Crank handle operation from the side or front
- Cylinder stroke: 300mm as standard - adjustable from 700 to 1000 mm
- Fully welded assembly
- Dimensions (L x D): 1000 x 700 mm



Part no.	Designation	€	PROMO €
011781	Fixed height 304 stainless steel table	4215--	2350 -

CLEARLINE UNDER-COUNTER MOBILE FURNITURE

Our ClearLine mobile units are practical and robust, and can be positioned under the workbench and moved easily if required.

- Two different heights to optimise the space available under the different benches
- Multiple configurations to meet every need:
 - with doors: opens to 270°
 - with drawers: "soft close" assisted closing system
 - with doors and drawers
- Depth of furniture: 520 mm
- Equipped with 4 castors, diameter 75mm, two of which have brakes
- Delivered assembled



ClearLine

NEW

Length (mm)	No. of doors	No. of drawers	Height 790 mm			Height 640 mm		
			Part no.	€	PROMO €	Part no.	€	PROMO €
530	1	-	370103	287--	240 -	370106	269--	225 -
600	1	-	370104	302--	252 -	370107	280--	234 -
830	2	-	370136	380--	318 -	370138	357--	299 -
900	2	-	370137	393--	329 -	370139	367--	307 -
530	-	4	370101	450--	374 -	-	-	-
600	-	4	370108	446--	373 -	-	-	-
830	-	4	370109	484--	404 -	-	-	-
530	-	3	370112	385--	322 -	370117	367--	307 -
600	-	3	370113	400--	334 -	370118	377--	315 -
830	-	3	370114	438--	366 -	370119	413--	345 -
530	1	1	370127	339--	284 -	370130	315--	263 -
600	1	1	370128	352--	295 -	370131	326--	273 -
830	2	1	370132	426--	356 -	370134	348--	290 -
900	2	1	370133	439--	367 -	370135	356--	297 -




30 MIN MULTI-RISK SAFETY CABINETS - EN 14470-1 & FM

TRIONYX

- 30-minute fire resistance
- Separation by families of hazardous products
- Base with cover for easy movement by pallet truck, unloaded, except under-counter model
- 3 door locks with key
- Ventilation holes Ø 100 mm
- System for holding doors open with automatic closing in the event of fire
- Height-adjustable retention shelves in 32 mm increments
- Detachable drip tray in lower part

Part no.	Designation	Ext. dimensions H x L x W (mm)	Internal equipment		Weight (kg)	€	PROMO €
			Retention bins	Grating for bins			
060358	2-door under-cabinet with 2 compartments	635 x 1115 x 630	2	2	108	3467--	2112 -

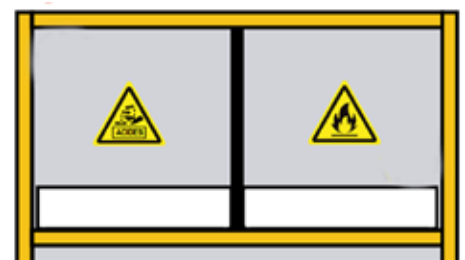

HEALTH AND SAFETY

30-MINUTE SAFETY CABINETS FOR FLAMMABLE PRODUCTS



Specially designed for the storage of flammable products in accordance with EN 14470-1 (04/2004) and FM 6050.

- 38 mm thick insulation panels build
- Detachable drip tray in lower part
- Height-adjustable retention shelves
- Ventilation hole Ø 100 mm
- Standard symbols
- 3 door locks with key




Part no.	Ext. Dimensions W x D x H (mm)	Capacity of storage (l)	Retention capacity (l)	Number of doors	Number of Gratings	Weight (kg)	€	PROMO €
060337	605 x 630 x 635	30	20	1	1	64	2155→	1363 -
060338	1115 x 630 x 635	60	41	2	1	108	3219→	1787 -


Find all our **ASECOS wardrobes on special offer** at dulis.be or dulis.nl



BELGIUM



NETHERLANDS



<https://www.dulis.be/search/asecos?language=en>

<https://www.dulis.nl/search/asecos>

Receive our **catalogue free of charge!** 1000+ product pages classified by use.



BELGIUM



NETHERLANDS



<https://www.dulis.be/catalog/request?language=en>

<https://www.dulis.nl/catalog/request>

EQUIPMENT



ST-200 MAGNETIC SHAKERS

- BioCote antibacterial treatment
- Supplied with 2 x 25 mm PTFE magnets

Model	ST-200-S
Interface	Analog
Max. stirring capacity (l)	15
Shaker speed (rpm)	100-2000
Surface dimensions (mm)	150 x 150
Plate materials	Stainless steel
Part no.	002070B
€	374.28~
PROMO €	309 -

Cole-Parmer
an anlysa scientific company



Depending on model



dolis.be / dolis.nl

HOTE PLATE MAGNETIC SHAKER



Depending on model



more products
dolis.be / dolis.nl



Arex 5
Digital

Model	AREX 5 Digital
Interface	Digital
Stirring capacity (l)	20
Speed (rpm)	50 - 1500
Temperature range	Ambient at + 310 °C
Ø plate (mm)	135
Plate materials	Aluminium with ceramic coating
Part no.	399153
€	481.20~
PROMO €	385 -

ENDEAVOR PLATFORM VORTEX MIXER



- Supplied complete with non-slip platform

Interface	Digital
Speed (rpm)	100 - 800
Orbit (mm)	3
Dimensions tray (mm)	300 x 220
Mode of operation	Manual, continuous, timer or programmes
Timer	1 s to 99 h 59 min
Programming	8 programmes / 5 steps
Part no.	334133
€	1676~
PROMO €	888 -

EQUIPMENT

VORTEX SHAKER

VELP
SCIENTIFICA



- Manual mode with infrared detection activates agitation without pressure and reduces the risk of RSI

Model	Wizard
Interface	Analog
Speed (rpm)	0 - 3000
Orbit (mm)	4.5
Operating mode	Manual or continuous
Infrared sensor	Yes
Part no.	399006
€	350.50 -
PROMO €	280 -

VORTEX SHAKER

Scientific Industries, Inc.



The most versatile, with numerous configurations for every situation.

- Supplied with standard head and Ø 75mm vial holder

ORBITAL SHAKER FOR HEAVY LOADS

- Gradual increase in speed to avoid splashing
- Compatible with CO₂ rich environments
- Supplied with non-slip platform

Model	SHHD6850DG
Interface	Digital
Speed (rpm)	15 - 300
Orbit (mm)	51
Dimensions tray (mm)	610 x 910
Maximum load (kg)	68
Operating mode	Continuous or timer
Timer	1s to 160 h
Part no.	192109
€	6570 -
PROMO €	5585 -



OHAUS



more products
dulis.be / dulis.nl

EQUIPMENT

ORBITAL SHAKER SK-O180-S



- Supplied complete with non-slip platform

Interface	Digital
Speed (rpm)	40 - 200
Orbit (mm)	20
Dimensions tray (mm)	268 x 268
Maximum load (kg)	2
Operating mode	Continuous, timer
Timer	1min to 99h59min
Part no.	861279
€	168 -
PROMO €	134 -

TWO-WAY SHAKER SK-L180-S



- Supplied complete with non-slip platform

Interface	Digital
Speed (rpm)	40 - 200
Amplitude (mm)	20
Dimensions tray (mm)	268 x 268
Maximum load (kg)	2
Operating mode	Continuous, timer
Timer	1min to 99h59min
Part number	861280
€	168 -
PROMO €	134 -

OHAUS TWO-WAY SHAKER



- Gradual acceleration of speed to avoid splashing
- Load sensor for unbalance detection
- Supplied with non-slip rubber mat tray

Maximum load capacity (kg)	6.8
Speed (rpm)	20 - 300
Orbit (mm)	19
Timer	1 s to 160 h
Display	Digital
Dimensions tray (mm)	279 x 330
Cat. No.	192103
€	2340 -
PROMO €	1989 -



ROCKER SHAKER SH-200D-S-L SERIES



- Supplied with non-slip platform

Model	SH-200D-S-L
Interface	Digital
Speed (rpm)	5 - 70
Stirring angle	7 °
Dimensions tray (mm)	355 x 355
Maximum load (kg)	10
Operating mode	Continuous or timer
Timer	1 to 9999 min
Part no.	090774B
€	1293.37 -
PROMO €	1260 -



EQUIPMENT

ROTARY SHAKER WITH CAROUSELS RX-RD-PRO



- Metal claw carousels
- Up to 3 carousels can be combined with the optional overlay rod (1 rod per additional carousel)

Interface	Digital
Speed (rpm)	10 - 70
Stirring angle	0 - 90
Standard capacity	8 centrifuge tubes 50 ml
Operating mode	Continuous or timer
Timer	1 - 1199 min
Part no.	861193
€	1151-
PROMO €	806 -

MX-RD-E ROTARY CAROUSEL SHAKER



- Supplied complete with tube adapters

Interface	Analog
Speed (rpm)	0 - 80
Stirring angle	90° fixed
Standard capacity	60 microtubes 1.5/2.0 ml 16 centrifuge tubes 15 ml 8 centrifuge tubes 50 ml
Operating mode	Continuous
Part no.	861069
€	580.90-
PROMO €	407 -

TUBE REVOLVER ROTARY SHAKER

- Standard stirring or "oscillation" mode: vibration every 40°

Interface	Digital
Speed (rpm)	10 - 40
Stirring angle	Adjustable 0 - 90°
Adapters included	2 x 7 tubes 10/15 ml 2 x 7 tubes 5/7 ml 2 x 15 tubes 1.5/2.0 ml 1 x 6 tubes 50 ml
Operating mode	Continuous
Part no.	079547
€	459-
PROMO €	367 -



thermo
scientific

EQUIPMENT

INCUBATOR MIXER MICROPLATE INCUBATOR SHAKERS

- Heated lid to minimise evaporation and condensation
- Incu-Mixer MP4:
- Accepts Deepwells plates up to h. 46 mm



Model	Incu-Mixer MP2
Interface	Digital
Standard capacity	2 microplates SBS
Speed (rpm)	100 - 1200
Orbit (mm)	2
Temperature range (°C)	Ambient +5 to 70 °C
Accuracy (°C)	± 0.2
Uniformity (°C)	± 0.5
Operating mode	Continuous or timer
Timer	1min to 99h99min
Part no.	062572
€	2694.10~
PROMO €	2155 -



Benchmark Scientific

OHAUS MINI ROCKER OR 3D INCUBATOR SHAKER

Model	ISICMBCDG	ISICMBCDG
Type of shaker	Rocker	3D
Interface	Digital	
Speed (rpm)	1 - 50	1 - 30
Orbit (mm)/ stirring angle	0 - 15 °	0 - 20 °
Temperature range (°C)	Ambient +5 to +65 °C	
Dimensions tray (mm)	254 x 191	235 x 184
Mode of operation	Continuous or timer	
Timer	1s to 160h	
Part no.	192122	192123
€	3060~	3355~
PROMO €	2601 -	2852 -



OHAUS

THESE NEW SERVICE VEHICLES ARE REALLY PRACTICAL



EQUIPMENT

ROTO-THERM ROTATING STIRRER-INCUBATOR

Benchmark Scientific



- Supplied complete with adaptors
- Roto-Therm plus:
- 3 rotation modes: «mix», «pause» and «rock»

Model	Roto-Therm	Roto-Therm plus
Interface	Digital	
Speed (rpm)	24 fixed	5 - 70
Stirring angle	360 °	360 °
Temperature range (°C)	Ambient +5 to +60 °C	-
Adapters included	2 x 11 tubes 1.5/2.0 ml 2 x 5 tubes 5-7 ml 2 x 4 tubes 10-15 ml 2 x 1 tube 50 ml	
Operating mode	Continuous	
Dimensions (L x W x H)(mm)	295 x 216 x 229	-
Weight (kg)	4	4.5
Part no.	062812	062813
€	823.40~	1106.70~
PROMO €	650 -	885 -

THERMOMIXER SHAKER DRY BATHS

eppendorf

- Precise, even temperature control, optimised with the ThermoTop heated lid to prevent condensation
- 2D Mix-Control technology for perfectly even mixing motion
- Quick access keys for the most common temperatures
- Pre-assembled fixed bloc



Model	ThermoMixer F 0.5	ThermoMixer F 1.5	ThermoMixer F 2.0	ThermoMixer FP
Speed (rpm)	300 - 2000	300 - 1500		300 - 2000
Orbit (mm)	3			
Temperature range (°C)	Ambient + 4 to + 100 °C			
Accuracy (°C)	± 0.5°C			± 1 °C
Uniformity (°C)	± 0.5°C			
Heating speed (°C / min)	15 °C/min	11 °C/min	13 °C/min	18 °C/min
Standard capacity	24 x 0.5 ml microtubes	24 x 1.5 ml microtubes	24 x 2.0 ml microtubes	1 microplate or 1 Deepwells plate
Operating mode	Continuous			
Part no.	933118	035965	933119	035966
€	3062~	2987~	2987~	3189~
PROMO €	2450 -	2390 -	2390 -	2551 -

Pamper your samples with reproducible simplicity!



DIGITAL DRY BATHS

Benchmark Scientific

- Supplied with hinged lid
- Supplied with QuickFlip block or without support and to be completed with a block of your choice



Model	Myblock Mono
Interface	Digital
Temperature range (°C)	Ambient +5 to +105 °C
Accuracy	± 1 %
Uniformity	± 0,2 %
Standard capacity	1 block
Operating mode	Continuous or timer
Timer	1min to 99h59min
Cat. No. with Quick-Flip block	062578
€	1214.70~
PROMO €	972 -

EQUIPMENT

MULTITHERM SHAKER DRY BATHS



- Supplied without block, to be ordered separately

Model	MultiTherm heating/cooling
Interface	Digital
Speed (rpm)	200 - 1500
Orbit (mm)	2
Temperature range (°C)	Ambient -20 to +100 °C
Heating speed (°C / min)	5 °C/min
Cooling speed (°C / min)	-2.5 °C/min
Operating mode	Continuous or timer
Timer	1min to 99h59min
Steam generator	Yes
Part no.	060937
€	3702.70~
PROMO €	2950 -

ULTRASONIC BATHS ELMASONIC P



- 5 ultrasonic modes for better results:
 - Pulse: spot power increase to tackle stubborn dirt
 - Sweep: uniform ultrasound distribution
 - Degas: quick and easy degassing of cleaning fluid or samples
 - Power regulation: automatic power adjustment
 - Autostart: automatic start-up when target temperature is reached
- 2 selectable frequencies: 37 kHz for heavy soiling or 80 kHz for soft cleaning

Model	P 30 H
Interface	Digital
Volume (l)	2.75
Internal dimensions W x D x H (mm)	240 x 137 x 100
Basket dimensions W x D x H (mm)	198 x 105 x 50
Temperature range	+30 to +80 °C
Ultrasonic frequency (kHz)	37 / 80
Ultrasonic power (W)	120 x 100
Mode of operation	Continuous, Timer, Pulse, Sweep, Degas, Power control, Pause, Autostart
Timer	1 to 30 min
Bath part no	950226
€	942~
PROMO €	848 -

ULTRASONIC BATH

- 5 ultrasonics modes for better results
- Supplied with lid
- Supplied without basket



Model	Select 30
Volume (l)	1.6
Internal dimensions W x D x H (mm)	95 x 120 x 220
Temperature range	+40 to +80 °C
Ultrasonic frequency (kHz)	37
Operating mode	Continuous, timer, degas, Eco, Sweep, Dynamic
Part no.	497715
€	626~
PROMO €	563 -



EQUIPMENT



OHAUS™ SCOUT™ SKX AND STX PORTABLE SCALES

- Stainless steel tray
- Mechanical overload protection
- 1 mg models with weighing bell
- Multiple connectivity options for data storage and communication
- Operates on mains adaptor (supplied) or batteries (4 x AA, not supplied)
- External calibration

Scout SKX scales

- Backlit LCD display
- Simple 4-button control interface

Scout STX scales

- VGA colour touch screen
- Numerous application modes
- GLP printing options (date, time, identifiers)



SKX



STX

Model	123	223	222	422	622	1202	2202	421	621	2201	6201	8200
Capacity (g)	120	220	220	420	620	1200	2200	420	620	2200	6200	8200
Display accuracy (mg)	1				10				100			1000
Repeatability (mg)	2			10		20			100			1000
Linearity (mg)	3		10		20	30			100		200	1000
Stabilisation time (s)	1.5			1		1.5				1		
Tray size (mm)	Ø 93			Ø 120		170 x 140		Ø 120			170 x 140	
Dim. w x d x h (mm)	202 x 222 x 103						202 x 224 x 54					
Net weight (kg)						1						
Model part no. SKX	092707	-	092708	092709	092710	092711	092712	092713	092714	092715	092716	092717
€	505~	-	368~	439~	476~	565~	605~	216~	243~	362~	489~	296~
€ PROMO	417 -	-	304 -	362 -	393 -	466 -	499 -	178 -	201 -	298 -	403 -	244 -
Model part no. STX	092718	092719	092720	092721	092722	092723	092724	092725	092726	092727	092728	092729
€	810~	930~	615~	745~	810~	895~	930~	338~	401~	615~	790~	590~
€ PROMO	668 -	766 -	507 -	614 -	668 -	738 -	766 -	279 -	331 -	507 -	651 -	486 -

WARING BLENDOR 4 LITRE LABORATORY BLENDER

Laboratory mixer with 4 litre stainless steel container.

- Preselected speed
- Supplied with lid

Capacity	4 litres
Buttons	Off-Lo-Med-Hi-Pulse
Speeds (rpm)	15800, 18000 and 20800
Base	Grey epoxy-coated stainless steel case
Containers	Stainless steel + polycarbonate lid and rubber seal
Blades	Stainless steel
Part no.	087137
€	4099~
PROMO €	2348 -



WARING

LABORATORY GRINDER

High-performance grinder for grinding seeds, spices and nuts in just a few seconds.

- Lid safety lock
- Brushed metal body
- PULSE function to select the desired grain size
- Supplied with 3 bowls with storage lid
- Stainless steel container and grinding blades
- Warranty: 1 year

Speed	19000 rpm
Dimensions (LxWxH)	120.6 x 139.7 x 210.8 mm
Weight	5.9 kg
Cat. No.	087116
€	790~
PROMO €	449 -



WARING

EQUIPMENT



MICROCENTRIFUGES



- Microcentrifuge ideal for concentrating drops at the bottom of the tube: microtubes or PCR tubes
- Compact design
- Silent (≤ 45 dB)
- Easy to use: automatic start-up and switch-off when the lid is closed/opened

Supplied with 2 rotors:

- + a rotor for 8 microtubes 0.2 / 0.5 / 1.5 / 2.0 ml
- + a rotor for 4 strips of 8 PCR tubes

Speed (rpm)	7000	
RCF acceleration (g)	2680	
Capacity	8 microtubes or 32 0.2 ml PCR tubes	
Colour	Grey	Red
Part no.	258353	258352
€	250-	250-
PROMO €	180 -	180 -

PALM SLS LAB BASICS MICROCENTRIFUGES



These centrifuges are ideal for laboratory routines: short centrifugation, microfiltration and cell separation.

- Screen: Oled with speed and time display
- Quiet, economical engine



Supplied with:

- + rotor for 12 x 1.5/2 ml and 32 x 0.2 ml tubes and strips,
- + 2 sets of 0.2 ml and 0.5 ml adapters.

Model	Colour grey - black	Colour red
Capacity	- 12 microtubes of 0.5/1.5/2 ml - 44 PCR tubes of 0.2 ml - 4 strips of 8 PCR tubes of 0.2 ml	
Speed (rpm)	2000 - 10 000 - increments of 1000	
Max. RCF	- 6708 g for 1.5/2 ml tubes - 6596 g - 7490 g for strips	
Acceleration and deceleration settings	1 notch 2 notches	
Noise level (db)	58	
Dim. (W x D x H) (mm)	210 x 180 x 130	
Weight (kg)	1.5	
Power supply	AC 100-240 - 50 HZ/60 HZ	
Part no.	258366	258368
€	399-	399-
PROMO €	280 -	280 -

MICROWAVE OVENS



Model	MW 7751	MW 7772
Power (W)	800	900
Grill (W)	1000	-
Volume (l)	20	28
Programming and timer	Mechanical	Mechanical
Plate ø (cm)	24.5	31.5
Height above the plate(mm)	17.5	210
Part no.	067232	067241
€	213-	282-
PROMO €	116 -	113 -

EQUIPMENT

RACKS FOR CRYOBIXES

- Stainless steel
- Racks for freezers - 80 °C : TWINGUARD PHCBI
 - freezer - 80 °C 099336B : 16 x 972008 or 16 x 972009
 - freezer - 80 °C 099360B : 24 x 972008 or 24 x 972009

Part no.	Designation	Dimensions D x H x L (mm)	€	PROMO €
972008	Drawer rack 4 X 6 boxes of 133 x 133 x 50 mm	559 x 321 x 140	294-	97.30 -
972009	Rack with side access 4 x 6 boxes of 133 x 133 x 50 mm	559 x 321 x 140	230-	62.90 -



Astuce

See page 20 for our cryoboosters on special offer.

IZIDEFROST+ FROST EXTRACTOR FOR FREEZERS

izidefrost+

An essential Hoover for defrosting freezers.

- Very easy and practical to use, it encourages regular defrosting and eliminates the need to turn off the freezer
- Regular defrosting reduces electricity consumption costs and extends equipment life
- Equipped with a stainless steel scraper
- Equipped with a Hepa filter at the air outlet: prevents contamination if a sample is aspirated
- 22L stainless steel tank
- Can be used on -20°C/-30°C, -80°C and -150°C freezers
- Power supply: 220-240 V 50-60 Hz

Voltage (v) 220 -240	220 - 240
Power (w)	1200
Mains frequency (Hz) 50-60	50 - 60
Air flow rate (l/s)	62
Noise level (dba)	61
Weight (kg)	10
Part no.	111115
€	4070-
PROMO €	3400 -



dulis.be / dulis.nl



Fast, clean and easy

ICE MACHINES



With reserve - grain ice.

Model	GB 601 A-HCX	GB 902 A-HCX	GB 903 A-HCX
Condenser cooling	Air	Air	Air
Production in 24 h* (kg)	67	105	105
Capacity / reserve	10	20	30
Type of ice	Grain	Grain	Grain
Power (Watt)	400	470	470
Cooling fluid	R-290	R-290	R-290
Legs height (mm)	-	110/150	110/150
Water consumption (l/kg)	1	1	1
Part no.	670600C	670345C	670347C
€	3830-	3970-	4202-
PROMO €	2826 -	2930 -	3101 -

* For air/water temperature 21/15 °C.

CLEARLINE® DNA AND PCR WORKSTATIONS

ClearLine

- UV chamber with bactericidal UV lamps of wavelength 254 nm
- Models with glass or plexiglass walls
- Digital timer
- Internal lighting: white light (15 W lamp)
- Passage through the chamber for external connection
- Ideal for safe sample preparation:
 - UV radiation disinfects the inner surface, deactivating any DNA/ RNA, in 15-30 min
 - automatic shut-off of radiation when the door is opened
 - bactericidal chamber decontamination system, by cleaning-air circulation
 - ozone-free radiation



Model	Plexiglas	Glass
Wavelength	253.7 nm	
UV lamp	1 x 25 W	
Optical transmission	92 %	95 %
UV protection	> 99.9 %	> 96 %
Ext. dim. (mm) L x D x H	690 x 535 x 555	
Work surface (mm)	650 x 475	
Net weight (kg)	23	31
Part no.	490005	490005B
€	2529~	4285~
PROMO €	1528 -	2269 -

PORTABLE CO₂ MINI-INCUBATOR

- ABS body
- Stainless steel water tank
- Digital adjustment of temperature and CO₂ content
- Forced ventilation



Ext. Dimensions W x D x H (mm)	292 x 333 x 433
Interior dimensions W x D x H (mm)	224 x 200 x 340
Interior volume (l)	15.2
Temperature range at ambient T °C 25 °C	15 to 45 °C
Stability at 37 °C	± 0.25 °C
CO ₂ rate range	0 to 20 %
Precision CO ₂ rate at 5% CO ₂	± 0,1 %
Humidity % RH	80 %
Weight (kg)	6.8
Power supply	110 - 220 V; 50 - 60 Hz
Part no. Incubator	995037
€	5806~
PROMO €	2115 -

STIRRERS FOR CO₂ INCUBATOR

- Suitable for CO₂ incubators
- Supplied with platform and non-slip mat for vials and Petri dishes
- Platforms (universal or dedicated) and clamps sold separately

Model	NB-101SRC	NB-T101SRC
Type of shaking	Orbital	
Stirring speed (rpm)	30 - 300	
Orbit diameter (mm)	25	
Timer	Continuous or up to 47 h 59 min	
Display and control	LED, digital control	Touch panel
Part no.	995002	995042
€	5115~	5189~
PROMO €	3069 -	3113 -



995042



EQUIPMENT

OPTIKA BINOCULAR MICROSCOPE

- Binocular microscope
- For teaching and routine laboratory work
- Turret with 4 lenses
- To connect to our C-P6 camera, use part number 671186

Model	Binocular model B-292
Lighting	X-LED
Observation technique	White Light
Focus	Coaxial macro and micrometric focusing system (graduated, 0.002 mm) with stop system, to prevent contact between the lens and the sample
Turret	4 positions
Objectives	4X, O.N. 0.10, W.D. 15.2 mm 10X, O.N. 0.25, W.D. 5.5 mm 40X, O.N. 0.65, W.D. 0.45 mm 100X, O.N. 1.25, W.D. 0.13 mm (oil) All lenses are treated with anti-fungal system
Part number	671215
€	854 -
PROMO €	545 -



OPTIKA
MICROSCOPES
ITALY

IM-300 INVERTED MICROSCOPE

Ideal microscope for routine monitoring of cell cultures. For observations in white light or phase contrast.

- Trinocular model
- 45° inclined observation head
- Field of view 22mm
- 5-position lens turrets
- Equipped with the following lenses:
 - IOS LWD W-PLAN PH 10x/0.25
 - IOS LWD W-PLAN PH 20x/0.40
 - IOS LWD W-PLAN PH 40x/0.65
 - Supplied with a protective cover

Model	IM-300
Lighting	LED
Observation method	White light and phase contrast
Observation head	100/0 or 50/50 trinocular with camera
Turntable	Fixed size 250x160mm
Objectives	Phase: ph10x/ph20x/ph40x
Condenser	D'Abbe with 30mm numerical aperture
Part number	671669
€	3623 -
PROMO €	2080 -

Accessory

Part no.	Designation	€	€ PROMO
671186	C-mount adapter 0.5 x	278 -	142 -



074089
Optical paper



Specialist advice:

for cleaning of lenses and optical parts use
our reference 074089

EQUIPMENT

DIGITAL MICROSCOPE WITH TABLET

Microscope equipped with a detachable and adjustable tablet. Particularly suitable for routine light background applications.

Model	B-290TB
Lighting	Led 3.6 W
Lens	WF 10/20 mm
Observation mode	Brightfield
Model	Binocular
Head type	30° inclined and 360° rotating head
Objectives	4 X 10 X 40 X 100 X (oil)
Abbe condenser	ON 1.25
Tablet	10.1"
Operating system	Windows 10 32 bit
Screen	Tactile LED
Camera	3 MP
Signal	USB 2
Image dimension	2048 x 1536
Part no.	671191
€	1954~
PROMO €	1188 -



OPTIKA
MICROSCOPES
ITALY

PC TABLET WITH CAMERA FOR TRINOCULAR MICROSCOPE



- Touch screen 10"
- USB 2.0 connection
- 2 in 1 solution with a touch screen PC tablet and a 3 or 5 MPixel camera for image capture
- System can be installed on trinocular outlet with C-mount aptator

Model	TB-3W	TB-5W
Operating system	Windows 8.1 32-bit	
Network	Wireless bluetooth	
Autonomy	9 hours	
Camera resolution (MP)	3.14	5
Output signal	USB 2.0	USB 2.0
Language tablet	Multilingual	
Tablet software included	OPTIKA VISION LITE: photos or videos acquisition, measurements, objects or comments indication, documentation	
Storage	HDD 32 Go, also accepts SD cards	
Cables included	MicroUSB to USB, OTG cable, USB cable	
Dim. (cm) W x H x thickness	25.85 x 16.75 x 0.88	
Weight (g)	580	
Part no.	670976	670977
€	1903~	2223~
PROMO €	746 -	762 -

OPTIKA
MICROSCOPES
ITALY

PRO C-P6 CAMERA

Model	C-P6
Camera resolution	6.3 MP
Output signal	USB 3.0
Sensor size	1/1.8"
Sensor technology	CMOS
Image format	4/3
Pixel size	2.4 x 2.4 µm
Speed resolution	30 fps
Part no.	671262
€	951~
PROMO €	570 -

- Fast-reading dynamic camera
- This camera delivers detailed images of excellent quality, thanks to its SONY EXMOR CMOS sensor
- C-mount connection



OPTIKA
MICROSCOPES
ITALY

SAFEVAC SUCTION SYSTEMS

Ideal for aspirating cell culture media and supernatants.

- Level sensor to prevent overflow
- All accessories are autoclavable (bottles, hose, handle)
- Supplied with pump, bottle, cap, handle, hoses, sensor and suction syringe

Volume (l)	4
Suction (mbar)	0-600
Suction speed	1-15 ml / sec
Part no.	861142
€	1234,-
PROMO €	864 -



GILSON VERITY 4000 SERIES DISPENSERS AND DILUTORS

GILSON

- Comprehensive, intuitive graphical interface
- Compatible only with Gilson dilutor syringes
- Complete with controller, syringes and transfer tubes



Verity 4000 series dispensers / dilutors

Model	Verity 4020	Verity 4120
Syringe configuration	Single	Continuous
Interface	Without	
Flow rate	4 to 100 ml/min	
Dispensing accuracy	± 1 %	
Dimensions (w x d x h) (mm)	146 x 171 x 268	226 x 171 x 269
Weight (kg)	4.4	7.1
Part no.	400181	400182
€	4890,-	6733,-
PROMO €	4401 -	6060 -



Verity controller

- Supplied with dispensing handle

Dimensions (w x d x h) (mm)	200 x 140 x 235
Weight (kg)	1.4
Part no.	400183
€	3554,-
PROMO €	3199 -



Find accessories on promotion at Dulis.be or Dulis.nl

EQUIPMENT

GET INVOLVED IN SUSTAINABLE DEVELOPMENT!

BELGIUM



NETHERLANDS



Dulis-funded programmes to help you reduce your carbon footprint.

For more information, click here:
<https://www.dulis.be/about/csr/environment?language=en>
<https://www.dulis.nl/about/csr/environment>

DISCOVER THE GOGREEN SCORE

- **New:** Introduction of a "GoGreen Score" to compare the environmental impact of one GoGreen product with another.
- **Objective:** To offer the widest selection of environmentally-friendly products and solutions with our GoGreen products.
- **Web filter:** easily find over 1100 products with a GoGreen Score

- ✓ 3 distinguishing criteria, in the form of a leaf
- ✓ Easily identifiable main arguments
- ✓ A more detailed PDF file on the Gogreen score

Filters

- (94) OUR SELECTION
- (4) BEST SELLER
- (94) GO GREEN



Dispensette S Organic analogique sans soupape de purge - volume

090123B

Unité de vente : 1

Marque : BRAND

Référence fabricant : 4630130



>> GoGreen : 100% énergie renouvelable + packaging 90% matière recyclée + fabriqué en Allemagne
Note : 20,5/36 / Fabrication : / Fabrication locale : / Packaging :

Standing Ovation

For every purchase of items in this brochure, we offer one of the following gifts:
(note: please specify the gift's part number on your order form).
Valid from 1 September to 31 December 2024 while stocks last.

For all orders with a value of:

300 € EXCL. VAT



Candy box

Part no. 000246
Haribo candies
750 g

500 € EXCL. VAT



Timer alarm

Part no. 257091
Up- down counter

1.000 € EXCL. VAT



Head lamp

Part no. 000311
3 lighting modes

2.000 € EXCL. VAT



Basket to share

Part no. 000162
Surprise parcel to share

4.000 € EXCL. VAT



Battery solar

Part no. 000316
2 USB output ports

5.000 € EXCL. VAT



Bodum piston teapot

Part no. 000364
and 2 double-walled glasses

9.000 € EXCL. VAT



Espresso machine

Part no. 000187
Nespresso Inissia

DULIS SRL - COMPANY NUMBER: BE 0770.586.113

HEAD OFFICE

Zoning Industriel de Rhisnes
Rue de Neverlée 11
B-5020 Suarlée (NAMUR)
BELGIUM
Tel. +32 81 94 66 00

HOW TO ORDER

Send your order form
by email: orders@dulis.be
online under the [Contact](#) tab.



www.dulis.be / www.dulis.nl
LinkedIn