


Remote temperature and humidity recorders

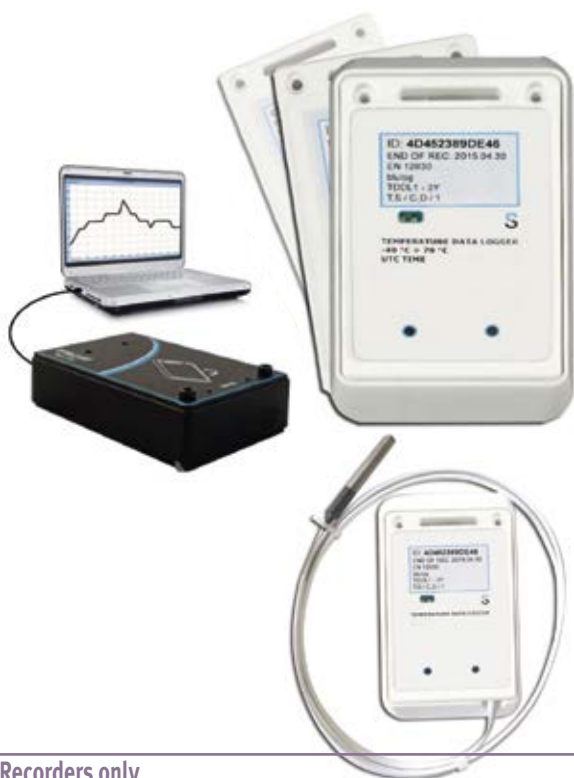

- ▶ Wireless temperature or temperature/hygrometry recorders
- ▶ Date and time recording, very short reaction time thanks to the small size of the device
- ▶ Factory calibrated sensors
- ▶ Stores up to 3 years and 185,000 measurements (including lithium battery)
- ▶ Data provided in tabular or graphical form
- ▶ Unique serial number with QR code
- ▶ Encrypted data transmitted via secure 868 MHz high frequency radio
- ▶ Dimensions : 85 x 55 x 5 mm (credit card)
- ▶ Weight : 30 g
- ▶ IP 67 sealing
- ▶ HACCP/EN12830 compliant
- ▶ Recorders supplied with wall mounting
- ▶ Wireless Hub receiver included in initial packs, allows remote monitoring via internet and addition of alarms via email or SMS
- ▶ Adding optional recorders (recorders only)
- ▶ Range 700 m, extendable to 1400 m with optional repeater

Starter packs

Cat. No.	Description	€ Excl. VAT
253409	176BL recorder and HUB receiver pack	NC -
253412	177BL recorder and HUB receiver pack	NC -
253755	178BL recorder "cold chain" and HUB receiver pack	NC -
253756	179BL recorder "hot chain" and HUB receiver pack	NC -

Recorders only

Cat. No.	Description	Range of use	Accuracy	Sampling interval	€ Excl. VAT
098452	Wireless Temperature Logger 176BL	- 40 °C to +70 °C	Between 0 °C and 30 °C : ±0,2 °C, or ±0,5 °C	10 minutes	NC -
253411	Wireless Temperature and Humidity Logger 177BL	Temp : - 40 °C to +70 °C Humidity : 0% to 100% RH	Temp : from 0 °C to 30 °C : ±0,2 °C, or ±0,5 °C Humidity : from 20 % to 80 % : ±5 % HR	15 minutes	NC -
253753	178BL "cold chain" temperature recorder with 1 m cable probe	- 40 °C to +60 °C	Between 0 °C and 30 °C : ±0,2 °C, or ±0,5 °C	10 minutes	NC -
253754	179BL "hot chain" temperature recorder with 1 m cable probe	+20 °C to +120 °C	Between 0 °C and 30 °C : ±0,2 °C, or ±0,5 °C	10 minutes	NC -

Option

Cat. No.	Description	€ Excl. VAT
098454	Long distance repeater (1400 m)	NC -

Temperature/Humidity Logger - 8 channels 3039T



- ▶ Up to 8 optional transmitters
- ▶ Memory for 50,000 date values
- ▶ Programmable intervals : 15 seconds to 24 hours
- ▶ Dew point function
- ▶ Max / min / alarm function
- ▶ Radio controlled clock/calendar
- ▶ USB cable/Office compatible
- ▶ Stand or wall mounting

Temperature	0 to 50 °C (station) / -30 to 50 °C (transmitter)
Resolution	0.1 °C
Accuracy	+/- 1 °C
Hygrometry	1% to 99%RH
Resolution	1 %
Accuracy	+/- 3 %RH
Power supply	3 x AA
Dimensions (mm)	137 x 98 x 26
Weight (g)	430

Cat. No.	Description	€ Excl. VAT
098418	Temperature / humidity recorder - 8 channels	NC -
098419	Wireless temperature and humidity transmitter	NC -
098420	Wireless temperature transmitter with wired sensor	NC -